

## Specifications:

- Metal construction for durability and reliability
- Pressure balancing volume control with 2-way, single handle diverting
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Valve and trim packages are sold separately
- Requires the fluid F1002B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX.)

## Components:

F1001T .....	Sleeve Tube and Cap
FP6019041 .....	Yaletown Handle
FP6001035-2PS .....	Round Cover Plate
FP20100 .....	5 Function Shower Head
FP6016008 .....	8" Shower Arm
FP6057034 .....	Pipe Tub Spout

## Yaletown 5 Function Shower Head & Tub Spout Trim Kit

F194104T



## Features:



Requires F1002B



Bubble Level



Integral Stops




Speed Connect

Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)

## Technical Drawing

F194104T

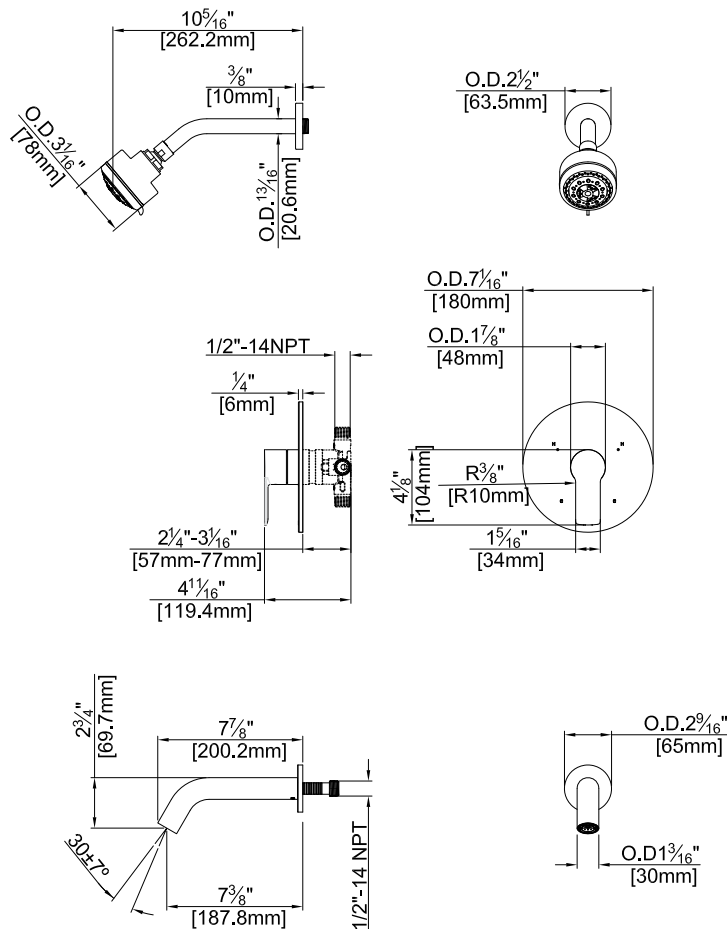

### Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.  
2 Year Limited Warranty on all industrial, commercial and business applications.

### Codes and Standards:

ANSI/ASME A112.18.1  
CSA B125.1  
IAPMO / cUPC Listed  
EPA Watersense Listed

### Flow Rate:

Shower Head 1.8 gpm @ 60 psig  
Tub Spout 4.5 gpm @ 60 psig  
  
Low Flow Alternative: Shower Head @ 1.5 gpm: **F194104T-15**