

## Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing volume control with 2-way, two handle diverting
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Valve and trim packages are sold separately
- ➔ Requires the fluid F1012B pressure balancing valve, (sold separately and available with shut off or \*\*sharing in solder, PEX and PEX-W, F1960 Expansion PEX.)

## Components:

F1001T .....	Cartridge Sleeve
FP6019041 .....	Yaletown Handle
FP801013 .....	Diverter Sleeve
FP605652 .....	Diverter Handle
FP6001142-2PB .....	Round Cover Plate
FP605652 .....	Diverter Handle
FP6006008 .....	16" Shower Arm
FP6002050 .....	8" Brass Rain Showerhead*
FP40120 .....	3 Function Hand Shower*
FA802 .....	Slide Bar with Integral Outlet
FP6001006 .....	60" Shower Hose*

\*\*sharing available where allowed by code

Kit with Alternate ADA Diverter Handle: **F192025T-AR**



## Features:

-  Requires F1012B
-  Bubble Level
-  Integral Stops
-  Speed Connect

## Yaletown 4" shower Head & Hand Shower on Slide Bar Trim Kit

F192025T




- \* Matte Black: FP6001007MB Hose, FP40130MB 3 Function Hand Shower & FP6002150MB ABS 8" Shower Head

Polished Chrome (CP), Brushed Nickel (BN) and \*Matte Black (MB)

## Technical Drawing

F192025T

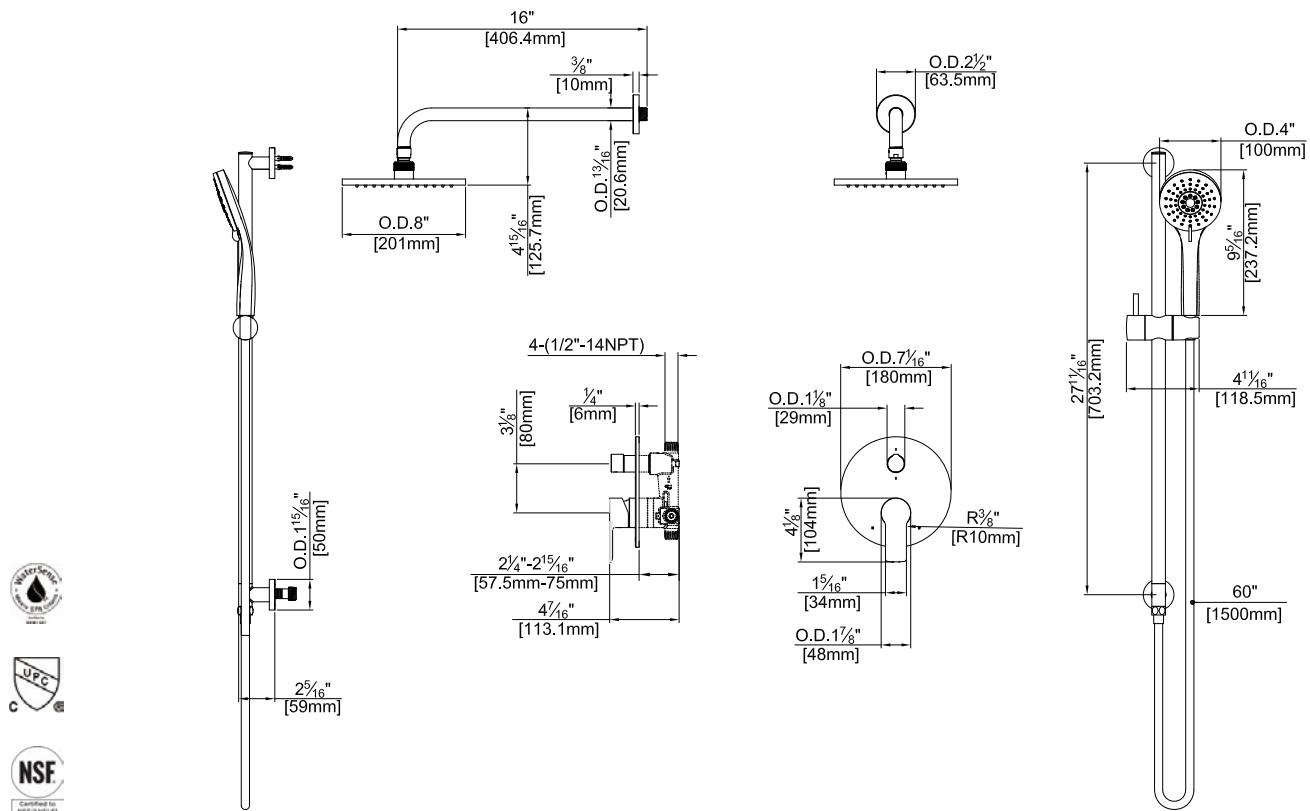

**Codes and Standards:** ANSI/ASME A112.18.1, CSA B125.1, IAPMO/cUPC Listed, EPA Watersense Listed

## Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

## Kit Variations:

Kit with ADA diverter handle:

**F192025T-AR**

Kit with square style cover plate & diverter handle: **F192025T-S**

## Flow Rate:

Shower Head 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F192025T-15**