fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control (non-diverting)
- → Max-temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- Requires the fluid F1001B pressure balancing valve, (sold separately and available with shut off in solder, PEX and PEX-W.)

Components:


F1001TMB	Cartridge Sleeve
FP6016041MB	Quad Handle
FP6001033MB-1PB	Square Cover Plate
FP933001MB	Switch Slide Bar
FP900208MB	8" Switch Shower Arm
FP10130MB	4" Shower Head
FP40130MB	3 Function Hand Shower
FP6001007MB	60" Shower Hose

Quad Switch 4" Shower Head & Hand Shower Trim Kit





Features:



Integral Stops

📼 Bubble Level

Speed Connect Slide Bar

Available in Matte Black

F161218TMB January 2024

fluid

Technical Drawing

NSE

Certified to NSF/ANSI 61

Warranty:

Limited Lifetime Faucet Warranty

against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

fluid by Sustainable Solutions


Codes and Standards:

ANSI/ASMEA112.18.1, CSA B125.1, IAPMO/cUPC Listed, EPA Watersense Listed

Flow Rate:

Hand Shower 1.8 gpm @ 60 psig Shower Head 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower & Shower Head @ 1.5 gpm: F161218TMB-15

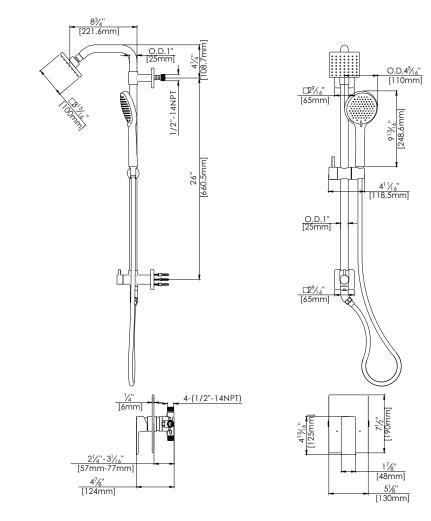



F161218TMB

