fluid

Specifications:

- → Metal construction for durability and reliability
- > Pressure balancing volume control (non-diverting)
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- > Valve and trim packages are sold separately
- → Requires the fluid F1001B pressure balancing valve, (sold separately and available with shut off in solder, PEX and PEX-W.)

Components:

F1001TMB	Cartridge Sleeve
FP6016041MB	Quad Handle
FP6001033MB-1PB	Square Cover Plate
FP933001MB	Switch Slide Bar
FP900208MB	8" Switch Shower Arm
FP10130MB	4" Shower Head
FP40130MB	3 Function Hand Shower
FP6001007MB	60" Shower Hose
FP6098034LMB	Curved Diverting Tub Spout

Features:





Integral Stops

Speed Connect Slide Bar

Quad Switch Tub, 4" Shower Head & Hand Shower Trim Kit

F161219TMB




Available in Matte Black

fluid

Technical Drawing

F161219TMB

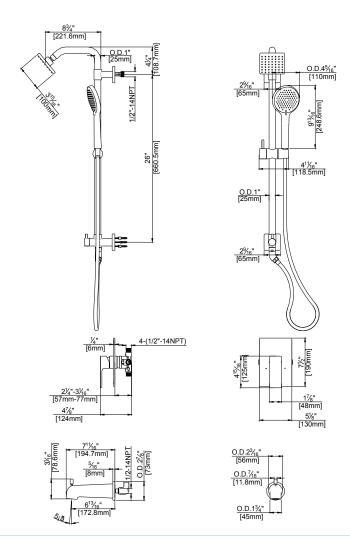







Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, EPA Watersense Listed

Flow Rate:

Hand Shower 1.8 gpm @ 60 psig Shower Head 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower & Shower Head @ 1.5 gpm:

F161219TMB-15