fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 3-way two handle diverting
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- > Valve and trim packages are sold separately
- Requires the fluid F1003B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001TMB	Cartridge Sleeve
FP6016041MB	Quad Handle
FP605752MB	Square Diverter Handle
FP801013MB	Diverter Sleeve Tube
FP6001143MB-3PB	Square Cover Plate
FP6001150MB	8" Square Shower Head
FP6021308MB	3" Ceiling Shower Arm
FA803MB	Square Slide Bar
FP40130MB	3 Function Hand Shower
FP6001007MB	60" Shower Hose
FP6056034MB	Cubed Tub Spout

^{**}sharing available where allowed by code

Features:



 $Requires\,F1003B$



Bubble Level



Integral Stops



Speed Connect

Quad Tub, 8" Shower Head and Hand Shower Trim Kit

F163222TMB




Available in Matte Black

fluid

Technical Drawing

F163222TMB

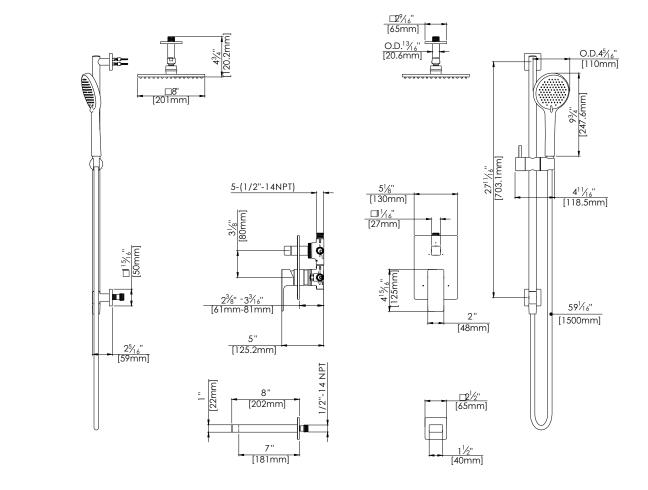

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, EPA Watersense Listed

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:



Kit with alternate ADA diverter handle: **F163222TMB-AR**

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig Tub spout 4.5 gpm @ 60 psig

Low Flow Alternative: 6" Shower Head and Hand Shower @ 1.5 gpm:

F163222TMB-15