

Specifications:

- Metal construction for durability and reliability
- Pressure balancing single handle 2-way diverting
- Max-temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Valve and trim packages are sold separately
- Requires the fluid F1002B pressure balancing valve, (sold separately and available with shut off in solder, PEX and PEX-W.)

Components:

F1001TMB	Cartridge Sleeve
FP6016041MB	Quad Handle
FP6001033MB-2PS	Square Cover Plate
FP6027008MB	8" Shower Arm
FP20100MB	5 Function Shower Head
FP6098035LMB	Curved Tub Spout

Features:

-  Requires F1002B
-  Bubble Level
-  Integral Stops
-  Slip Fit Tub Spout

Quad Tub and 5 Function Shower Head Trim Kit


F164213TMB



Available in Matte Black

Technical Drawing

F164213TMB

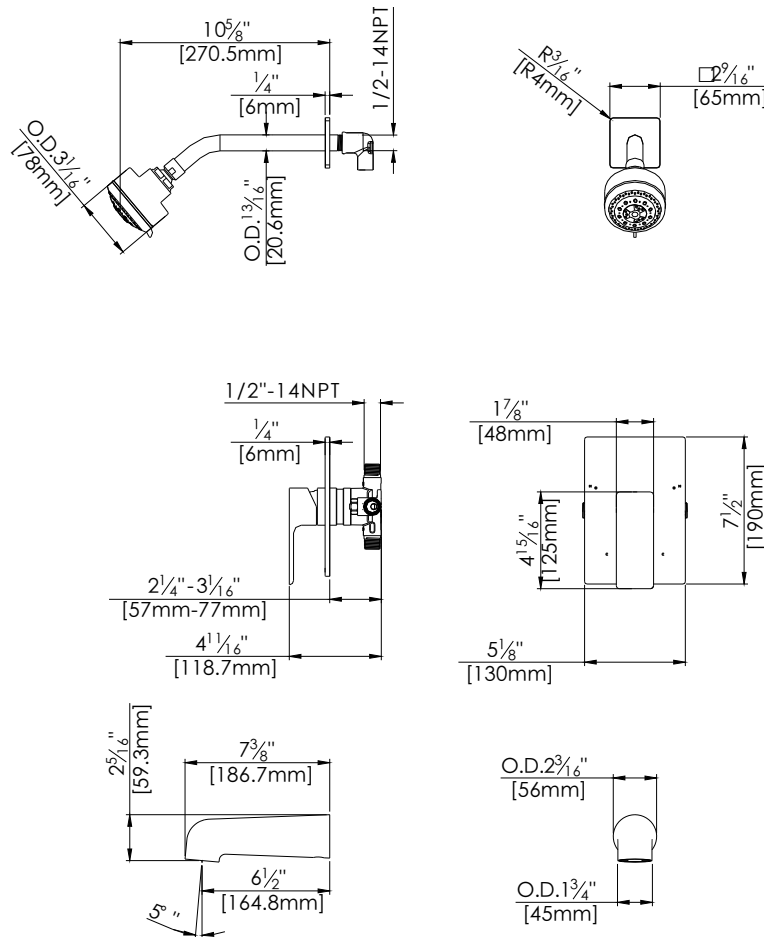

Warranty:

Limited Lifetime Faucet Warranty
against material and manufacturing
defects for residential use.

2 Year Limited Warranty on all industrial,
commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1, CSA
B125.1, IAPMO / cUPC Listed, EPA
Watersense Listed

Flow Rate:

Tub spout 4.5 gpm @ 60 psig
Shower Head 1.8 gpm @ 60 psig

Low Flow Alternative: Shower Head @
1.5 gpm: **F164213TMB-15**