fluid

Specifications:

- → Metal construction for durability and reliability
- → Pressure balancing single handle 2-way diverting
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- > Valve and trim packages are sold separately
- → Requires the fluid F1002B pressure balancing valve, (sold separately and available with shut off in solder, PEX and PEX-W.)

Components:

F1001TMB	Cartridge Sleeve
FP6016041MB	Quad Handle
FP6001033MB-2PS	Square Cover Plate
FA803MB	Square Slide Bar
FP40130MB	3 Function Hand Shower
FP6001007MB	60" Shower Hose
FP6027008MB	8" Shower Arm
FP20100MB	5 Function Shower Head

Features:



Requires F1002B



Bubble Level




Integral Stops



Speed Connect Slide Bar

Quad 5 Function Shower Head & Hand Shower Trim Kit

F164215TMB

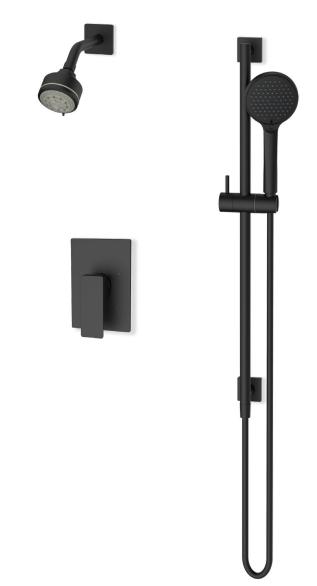


Available in Matte Black

fluid

Technical Drawing

F164215TMB

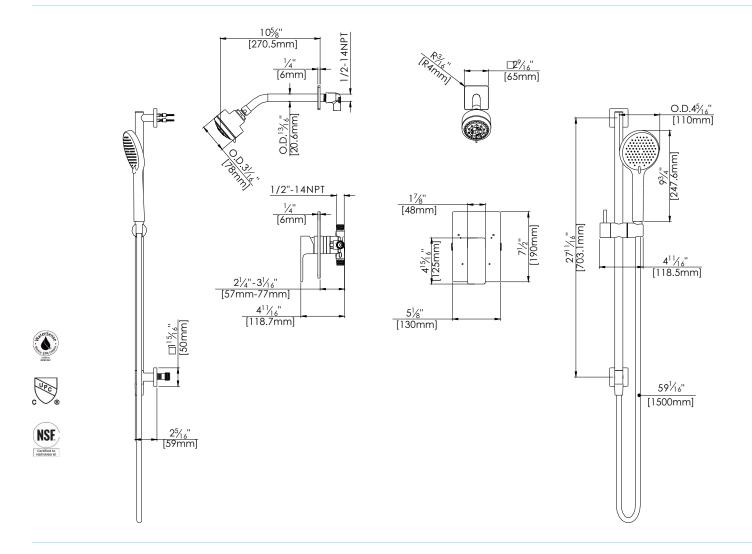

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, EPA Watersense Listed

Flow Rate:

Hand Shower 1.8 gpm @ 60 psig Shower Head 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower & Shower Head @ $1.5\,\mathrm{gpm}$:

F164215TMB-15