fluid

Specifications:

- → Metal construction for durability and reliability
- > Pressure balancing volume control (non-diverting)
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- > Valve and trim packages are sold separately
- → Requires the fluid F1001B pressure balancing valve, (sold separately and available with shut off in solder, PEX and PEX-W.)

Components:


F1001TMB	Cartridge Sleeve
FP6024041MB	J
FP6001035-1PB	Cover Plate
FA802MB	Slide bar
FP40130MB	3 Function Hand Shower
FP6001007MB	60" Hose
FP6098034LMB	Curved Diverting Tub Spout

Wisdom Tub & Hand Shower Trim Kit


F281213TMB



Features:



Bubble Level



Speed Connect Slide Bar


Slip Fit Tub Spout

Available in Matte Black

fluid

Technical Drawing

F281213TMB

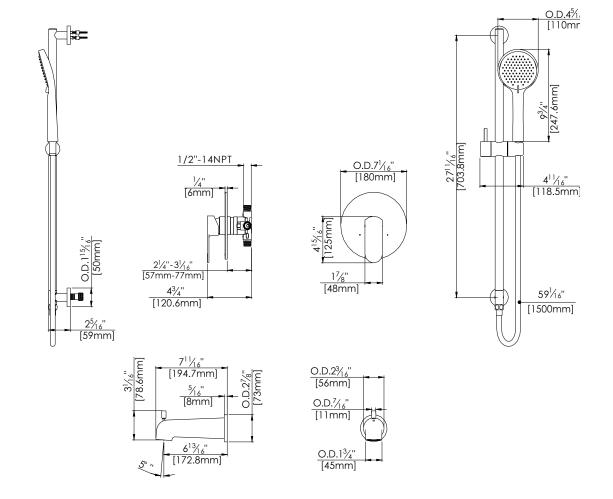

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, EPA Watersense Listed

Flow Rate:

Hand Shower 1.8 gpm @ 60 psig Tub Spout 4.5gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F281213TMB-15**