fluid

Specifications:

- → Metal construction for durability and reliability
- → Pressure balancing volume control with 2-way two handle diverting
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- Requires the fluid F1012B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

| F1001TMB | Cartridge Sleeve |
|-----------------|------------------------|
| FP6016041MB | Quad Handle |
| FP605752MB | Square Diverter Handle |
| FP801013MB | Diverter Sleeve Tube |
| FP6001143MB-2PB | Square Cover Plate |
| FP6001150MB | 8" Rain Shower Head |
| FP6007108MB | 16" Shower Arm |
| FP6056034MB | Cubed Tub Spout |

^{**}sharing available where allowed by code

Quad Tub and 8" Rain Shower Head Trim Kit

F162210TMB







Features:



Requires F1012B



Bubble Level



Integral Stops




Speed Connect


Available in Matte Black


fluid


Technical Drawing


F162210TMB










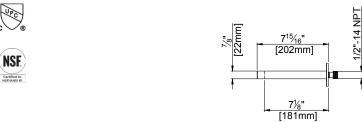



Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, EPA Watersense Listed

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:



Kit with alternate ADA diverter handle: **F162210TMB-AR**

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig