


Specifications

- Heavy forged brass construction for durability and reliability
- Pressure balancing ceramic cartridge ensures anti-scald operation and life-long trouble-free service
- Single lever handle operation allows both volume and temperature control; rotating diverter handle directs water between two ports.
- Max-temperature limit stop for added safety
- Integral stop valves for easy maintenance
- Dual inlet and outlet ports – 1/2" CxC soldering & 1/2" NPT thread
- Adjustable installation depth from 2 3/8" (60mm) to 3 1/8" (79mm)
- Mud guard is provided to help protect valve from dust and debris during installation
- Bubble level is attached to mud guard for easy and level installation
- Compliant to Cal Green requirement with a minimum transitional flow
- A wide selection of complimentary trims are sold separately

Codes and Standards

- ANSI/ASME A112.18.1
- CSA B125.1
- IAPMO / cUPC Listed 

Warranty

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Flow Rate:


- 4.5 gpm @ 60 psig

Features:

-  Heavy Brass
-  Integral Stops
-  Ceramic Disc Cartridge
-  Bubble Level

Pressure Balancing Three Way Valve (Two Handle)

F1003B 

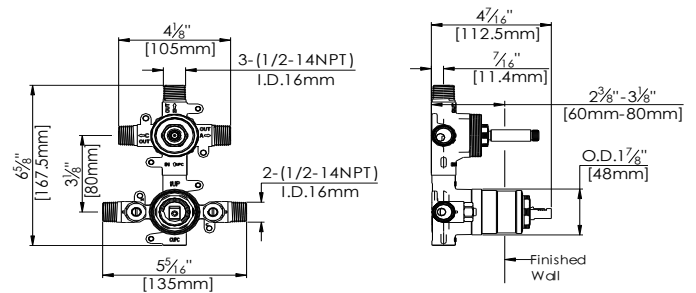

Forged from Heavy Brass

Models Available:

- **Solder/NPT:** F1003B
- **PEX:** F1003B-PEX
- **PEX-W:** F1003B-PEX-W

Models Available with Sharing:*

- **Solder/NPT:** F1003B-SHARE
- **PEX:** F1003B-PEX-SHARE
- **PEX-W:** F1003B-PEX-W-SHARE

*Note: where allowed by code