fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 2-way two handle diverting
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Valve and trim packages are sold separately
- Requires the fluid F1012B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001TMB	Cartridge Sleeve
FP6028341MB	Wisdom Handle
FP801013MB	Diverter Sleeve
FP605652MB	Diverter Handle
FP6001142MB-2PB	Cover Plate
FP6016008MB	8" Shower Arm
FP6000350MB	6" Shower Head
FA802MB	Slide bar
FP40130MB	3 Function Hand Shower
FP6001007MB	60" Hose

^{**}sharing available where allowed by code

Features:





Integral Stops

Speed Connect

Wisdom 6" Shower Head & Hand Shower Trim Kit

F282028TMB



Available in Matte Black

fluid

Technical Drawing


F282028TMB

O.D.4⁵/₁₆

4¹/₁₆" [118.5mm]

59¹/16"

[1500mm]

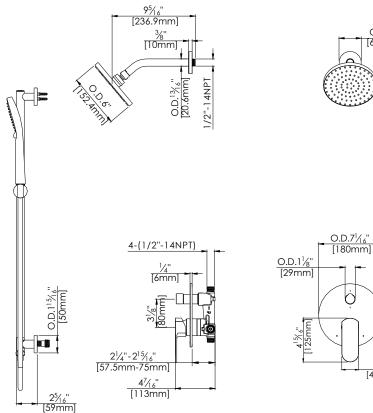

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, EPA Watersense Listed

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:



Kit with alternate ADA diverter handle: **F282028TMB-AR**

Flow Rate:

O.D.2½" [63.5mm]

> Shower Head 1.8 gpm @ 60 psig Hand Showerr 1.8 gpm @ 60 psig

> Low Flow Alternative: Shower Head & Hand Shower @ 1.5 gpm: **F282028TMB-15**