

Specifications

- → Vitreous China Dual Flush High Efficiency Toilet (HET)
- > Elongated washdown bowl with box flushing rim.
- → Designed to provide a seat height of 17 ½" (445mm) measured to the top of the toilet seat.
- > Smooth contours and a concealed outlet for easy cleaning
- The toilet is suitable for multi-purpose applications, including those where water conservation is important
- → A 326202W soft close seat is included.
- Weight: 103 lbs (47.0 kg)

Outlet:

Floor mounted. Connection to waste outlet requires the offset plastic **Caroma Smart Connect** outlet connector and is adaptable for 10'' (255mm) to 12'' (305mm) rough-in.

Tank:

The tank is an integral part of the toilet with a free fitting lid and is suitable for domestic and light commercial applications.

Water Control Valve:

Standard Bottom Entry Tank – available as left hand inlet and incorporates a super quiet water control assembly. Internal overflow only.

Fixing:

The one piece toilet is fixed to the floor with corrosion resistant screws and closet bowl guard washers and a fixing assembly kit. Bowl is to be bonded to the floor with an approved silicon caulking.

Features:



Dual Flush



Smart Connect Included



Smart Glazed Bowl



One Piece



 $\mathsf{Skirted}\,\mathsf{Bowl}$



Soft Closing Seat

Sydney Smart One Piece Easy Height Elongated Button Toilet

987150W

Flush Volume: 1.28/0.8 gpf (4.8/3 lpf)

987150W

10-3/4"

Technical Drawing & Certifications

All dimensions are in inches and millimeters and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

Closet bowl fixing: The closet bowl should be sealed with an approved silicon caulking.

Smart Glaze "



Watersense Certified




Uniform Plumbing Code Certified




MAP Premium Certified



High Efficiency Toilet

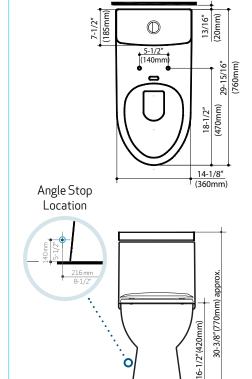



Warranty:

Two year limited warranty

Caroma plumbing products are warranted to be free of defects in material and workmanship for two years after their initial purchase. This limited warranty applies only to the original purchaser and installation of these products. In the event of a limited warranty claim, proof of purchase from an authorized reseller will be required. 10"(255mm) 12"(305mm)