

caroma®



Somerton Smart
1.28/0.8 gpf (4.8/3 lpf)
Easy Height & Elongated
Dual Flush Toilet
Bowl #829109
Tank #810788
Vitreous China Dual Flush
High Efficiency (HET),
Two Piece Washdown Toilet

PLUMBER'S INSTALLATION INSTRUCTIONS. PLEASE READ CAREFULLY BEFORE INSTALLATION.

Rough in:

It is possible to fix the toilet into 10" (255mm) or 12" (305mm) rough in positions by rotating the offset adaptor as detailed in Fig.1

IMPORTANT:

Reducing wax ring **MUST NOT** be used when installing this toilet bowl as detailed in Fig.2.

Working Water Pressure:

USA & Canada: Recommended working water pressure is 20-80psi (140-550Kpa).









Installation Procedure:

1. It is important for the installation of Somerton Smart two piece washdown bowl that the closet flange be accurately set out from the finished wall as detailed in Fig.3.
2. Position wax ring and offset adaptor onto closet bolts as detailed in Fig. 4 and 5, ensuring that the offset adaptor is positioned for 10" (255mm) or 12" (305mm) rough in as detailed in Fig.1.
3. Place a fixing bracket onto each closet bolt and secure by hand tightening nuts and washers onto the closet bolts as detailed in Fig.5. Apply an additional turn for final installation by a wrench.
4. Ensure that the area around the closet bowl is clean and free from building materials.
5. Accurately align the closet bowl over the offset adaptor and lower into position.
6. Insert the plastic bushing and brass bushing into the bowl fixing hole as shown in Fig.6. Secure the bushings through the holes in fixing bracket with SS screws as shown in Fig. 7. Spacing between the outside of the Somerton bowl and the fixing bracket can vary. To ensure the best possible installation 2 lengths of SS screws have been supplied. Start with the shorter 30mm (1-3/16") set of SS screws and fasten as shown in Fig. 7. If when fastening there is no resistance, (meaning that the screw has not sufficiently fastened into the fixing bracket), substitute the longer 55mm (2-3/16") screws. Do not start with the longer hardware as you do not want the screws to insert past the fixing bracket into the offset adaptor, as this can affect your seal. Cover the holes with cap.
7. It is recommended that a bead of silicone caulking is applied fully around base of the closet bowl, leaving 1-2" at the rear.
8. Remove any excess silicone caulking.

Fixing Bracket Assembly

687088

(w/ 30 & 55mm Long Screw)

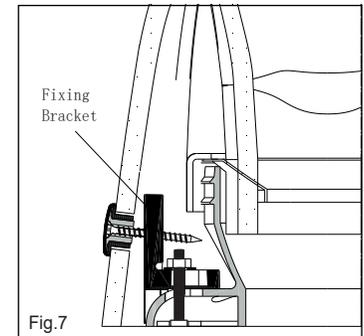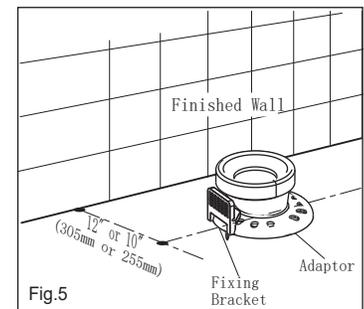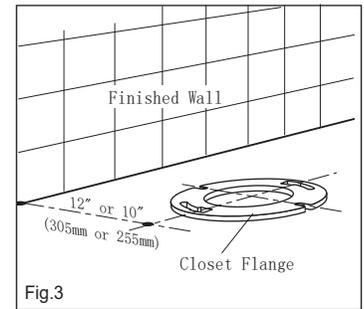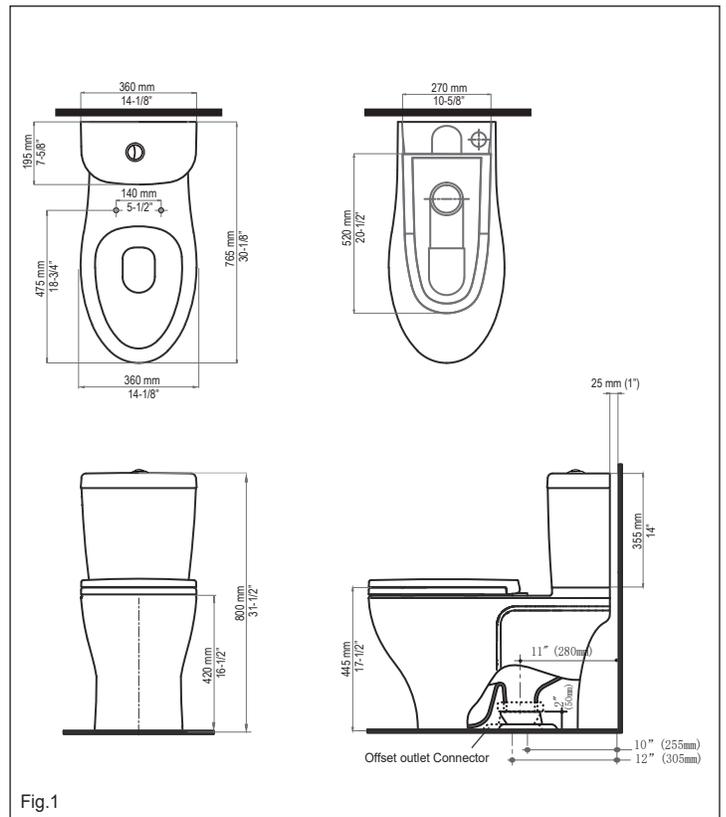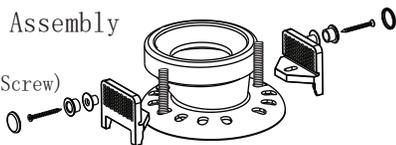

Somerton Smart Two Piece 1.28/0.8 gpf (4.8/3 lpf) Easy Height & Elongated Dual Flush High Efficiency (HET) Washdown Toilet Bowl #829109 Tank #810788

Tank Fixing Procedure:

1. Determine the type of water supply connection to be used. Note: Tapered rubber seal and wing nut assembled at inlet valve connection end is for 3/8" tube/pipe connection. Remove them if the braided toilet supply line is used.
2. Connect the supplied braided toilet supply line to the end of inlet valve connection. Tighten with a wrench by 1/4 turn. Do not overtighten.
Note: the braided supply line must be attached before installing the tank onto the bowl.
3. Ensure that the foam seal is fitted onto the tail piece on the underside of the tank as detailed in Fig. 8.
4. Lower tank onto closet bowl, allowing the braided toilet supply line and the two tank fixing bolts protruding below the tank to fit through the corresponding holes in the closet bowl.
5. Fit the supplied plastic wing nuts provided onto the tank fixing bolts that are protruding through the closet bowl and gradually tighten the left and right wing nuts by hand to evenly secure tank to closet bowl.
6. Connect water supply and check operation.

Tank Spare Parts

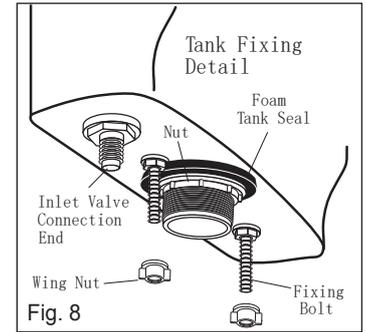


Fig. 8

All measurements are subject to accepted manufacturing tolerances. To ensure complete accuracy please check actual product dimensions before drilling for installation.

The manufacturer reserves the right to change specifications at any time without giving prior notification.

The product should be installed by a qualified plumber. Local authority, Water Board, and Building Regulations may apply to the installation of this product, and you should consult the appropriate bodies on these requirements. Failure to comply may invalidate the product warranty.

Inlet Valve Replacement Parts

Code	Part Description
A1280-REPAIRKIT	Rubber Seal Kit
A1280	Inlet Valve

Outlet Valve Replacement Parts

Code	Part Description
ARA24190010000	Outlet Valve Diaphragm Seal
A24231	Outlet Valve
A361053	Dual Flush Top Push Button

CLEANING INSTRUCTIONS FOR VITREOUS CHINA:

To preserve the glazed surface, this toilet should be cleaned only with a mild household detergent or warm soapy water. Do not use any abrasive cleaners in the tank or bowl as this can damage the glazing. Use of in tank cleaners or bleach tablets may void warranty.

For spare parts contact:

Sustainable Solutions

Under license from Caroma Industries Limited, Australia
 Manufactured by Sustainable Solutions
 Vancouver, BC, Canada + Ferndale, WA, USA
 Telephone: (604) 430.2020
 Toll Free: (800) 460.7019
 help@sustainablesolutions.com
 www.caromausa.com www.sustainablesolutions.com



ULTRA HIGH EFFICIENCY TOILET
UHET

