fluid

Specifications:

- Metal construction
- Designed to work in a new installation or to retrofit an existing installed shower arm
- Retro-fit slide rail features integral 2-way diverter to direct water between the hand shower and shower head
- → Features a swivel 16" Shower arm that has a 6" rise above the water inlet and is designed for a rain shower
- → When used for a retrofit, slide rail is intended to work with existing rough-in plumbing. Valves and valve covers are not included, but can be purchased separately
- Can be installed either by drilling into shower wall or a drill-free methose with waterproof glue.
- → Switch can also work with an installed diverter tub spout, so a non-diverting pressure balancing valve can deliver water to a tub, shower and hand shower.
- → Large 65 mm escuthcheons are available if needed in a retrofit situation to cover larger holes in the finished wall, (sold separately).

Components:

Features:





Speed Connect

Switch 18" Retrofit Shower System with 16" Shower Arm


F9516



Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)



Technical Drawing F9516

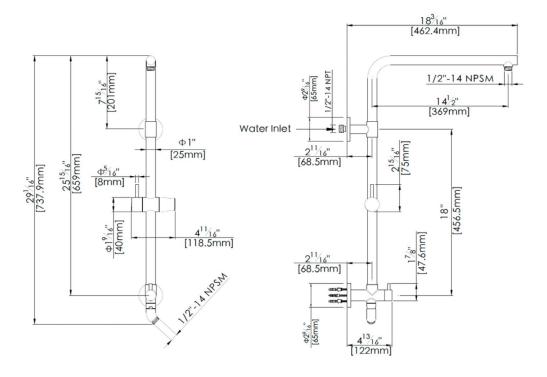







Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, EPA Watersense Listed

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes & Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed EPA Watersense Listed

Flow Rate:

N/A - dependant on shower components chosen