fluid

Quad Kitchen Faucet

Specifications:


- → Heavy brass construction for durability and reliability
- → Kerox ceramic cartridge ensures lifelong trouble free service
- High arc swivel spout with 360 degree or 140 degree rotation with supplied stop
- Single handle operation, allows both volume and temperature control
- Single function flow with square aerator.
- → Limited to a flow rate of 1.5 gpm (5.7 lpm) at 60 psi
- → Maximum deck thickness 2 15/16" (75 mm)
- → Minimum 1 3/4" (45 mm) distance is required from the back splash wall
- → 1-1/2" faucet hole size for drilling is recommended

F840



Features:









Heavy brass construction

Polished Chrome (CP), Brushed Nickel (BN)

fluid

Technical Drawing F840

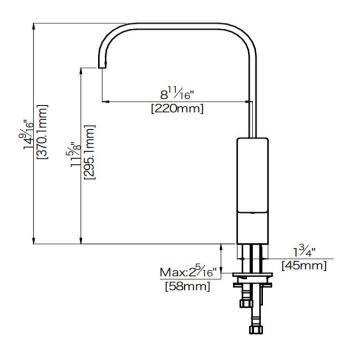

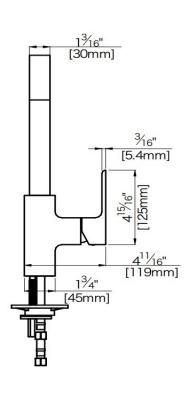









Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes & Standards:

ANSI/ASME A112.18.1 CSA B125.1 NSF/ANSI/CAN 61: Q < 1 NSF / ANSI / CAN372 IAPMO / cUPC Listed EPA Watersense Listed ADA Compliant

Flow Rate:

1.5 gpm, (5.7 lpm), @ 60 psig