fluid

Specifications:

- → Metal construction for strength and durability
- Pressure balancing volume control
- → Max temperature limit stop for added safety
- → Features a 16" Shower arm with a 6" rise above the water inlet; designed for a rain shower head
- → Square hand shower and square 8" round shower head
- Switch slide bar with built-in diverter directs water between the hand shower and the shower head
- → Square diverting tub spout
- → Requires the fluid pressure balancing F1001B or F1001B-PEX or F1001BPEX-W valve, sold separately.

Components:

F1001T	Sleeve Tube and Cap
FP6001033-1PB	. Square Cover Plate
FP6016041	. Quad Series Handle
FP900216	. 16" Switch Shower Arm
FP933001	Switch Main Shower Body
FP6001150	.8" Shower Head
FP6004048	3 Function Hand Shower
FP6001006	. 60" Shower Hose
FP6096034	Square Diverting tub spout

Features:



Pressure Balancing



Speed Connect

Quad Series Tub, Switch Shower Head and Hand Shower Trim Kit


F161242T





Polished Chrome (CP) and Brushed Nickel (BN)

Technical Drawing F161242T

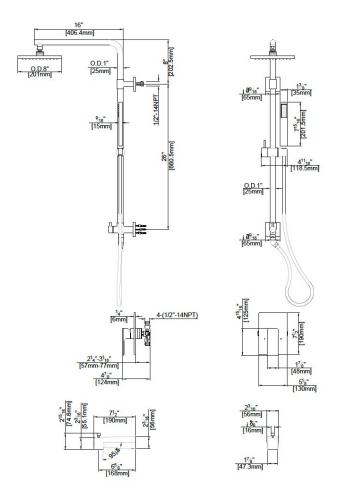







Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, EPA Watersense Listed

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes & Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed EPA Watersense Listed

Flow Rate:

Shower Head and Hand Shower: 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F161242T-15**