


# whats in the **box?**

## SSi by fluid Two Piece Elongated Washdown Toilet

301402 (Bowl) + 301400/R (Tank)

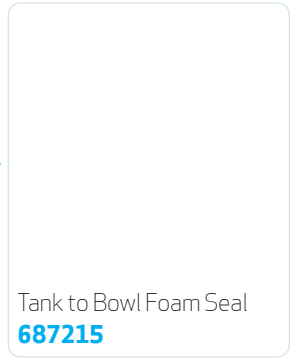

**fluid**

**SSi No Clog II by Fluid**  
Easy Height Vitreous China/NET Single Flush Round Front/40 Elongated Bowl and tank with Side Lever Flush

**Flush Volume:** 1.6 gpf (1.9 lpf)

Round Front Bowl #301402  
Elongated Bowl #301402  
Left Lever Tank #301400  
Right Lever Tank #301400-R

**PLUMBER'S INSTALLATION INSTRUCTIONS. PLEASE READ CAREFULLY BEFORE INSTALLATION.**

**Rough In**  
The rough in for the installation of the SSi No Clog II gpf (1.6 gpf) (1.9 lpf) Two Piece Washdown Toilet that the Close Toilet is or only set in from the finished as detailed in Fig. 1.

**IMPORTANT:**  
Flushing this toilet using **MUST NOT** be used when installing this toilet tank, as detailed in Fig. 2.

**Working Water Pressure:**  
CSA B141, ASME Recommended working water pressure is 20-80 psi (1.38-5.5 bar).

**Close Bolt Flange Problem:**

1. Position "T" bolts into Close Flange as detailed in Fig. 3.
2. Ensure that the area around the close bowl is clean and free from building material.

Toilet Installation Instructions

**These are all the items that come in every box with this toilet.** If you are missing anything that you see here that is not in your box, please contact customer service below.

