fluid

Specifications:

- → Metal construction for durability and reliability
- Brass spray head
- Angular swivel spout with 360 degree or 140 degree rotation with supplied stop
- > Pull out and retractable magnet system
- Single handle operation allows both volume and temperature control
- Quality ceramic cartridge ensures life long trouble-free service
- Quick and easy installation with quick hose connector
- > Dual function spray head with spray and aerated flow
- → Limited to flow rate of 1.8 gpm (6.8 lpm) at 60 psi
- Max deck thickness 1 3/4" (45 mm) with spacer and 2 1/2" (63 mm) without spacer
- → 1-½" (38 mm) faucet hole drilling is recommended
- 8" deck plate for 3 hole installation is available and sold separately
- → ADA Compliant

Features:



Dual Spray Kitchen Faucet



Pull Down Kitchen Spout



Magnetic Docking



Ceramic Disk Cartridge



Metal construction



360 Degree Rotation with 140 Degree Lock

Pull Down Kitchen Faucet with Magnetic Spray Head


F820




Polished Chrome (CP), Stainless Steel (SS) and Matte Black (MB)

fluid

Technical Drawing F820

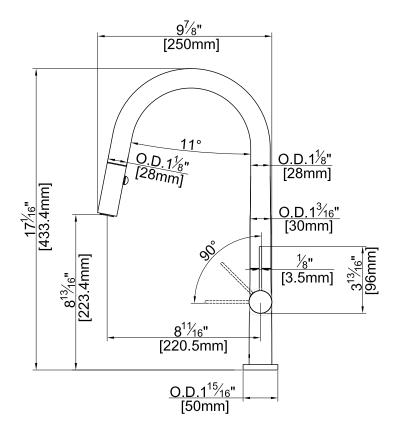

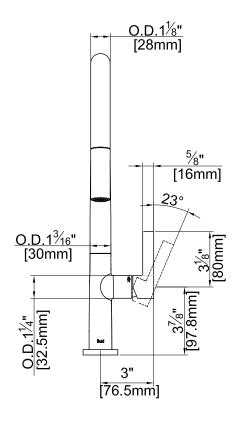









Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes & Standards:

ANSI/ASME A112.18.1 CSA B125.1 NSF/ANSI/CAN 61: Q < 1 NSF / ANSI / CAN372 IAPMO / cUPC Listed EPA Watersense Listed ADA Compliant

Flow Rate:

1.8 gpm (6.8 lpm) at 60 psi

Low Flow Alternative @1.5 gpm (5.7 lpm) F820-15