

Limited Lifetime Faucet Warranty

Fluid™ warrants its faucets to be free from defects in material and workmanship for as long as the original consumer/purchaser/owner owns his or her home.* Plastic and rubber components are warranted for a period of two years. This warranty applies only to original installation locations. If a defect is found in normal residential use, Fluid™ will, at its election, repair, provide a replacement part or product, or make the appropriate adjustment.

Fluid™ reserves the right to examine the product in question and its installation prior to replacement. This warranty is limited to replacement of defective parts only. Damage to a product caused by accident, improper installation, misuse or abuse, improper care of finishes, hard water or mineral deposits, potassium or salt based water softener systems or exposure to corrosive materials is not covered by this warranty. Improper care and cleaning will void the warranty.** Replacement parts can be obtained from your local dealer or directly from the Fluid™ warehouse, (shipping charges may apply). Dated proof of purchase must accompany all warranty claims. This warranty applies only to Fluid™ faucets installed in the United States of America, Canada or Mexico (North America). Fluid™ recommends using a certified plumber for faucet installation and repair. Incidental and consequential damages, labor charges, repair or replacement costs are expressly excluded. In no event shall the liability of Fluid™ exceed the purchase price of the faucet. Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation may not apply to you. This warranty gives you specific legal rights which vary from state/province to state/province. If you find any such problem with your product, please immediately contact your nearest Fluid™ dealer or sales representative.

Need Help?

For additional assistance
Toll Free: 1 800 460 7019
help@sustainablesolutions.com
www.sustainablesolutions.com

* Two year warranty on commercial applications.

** Never use cleaners containing abrasives cleansers, ammonia, bleach, acids, waxes, alcohol, solvents or other products not recommended for surface finish. This will void the warranty.

This faucet meets or exceeds the following standards:

ASME A112.18.1 / CSA B125.1 / NSF61-9

AB1953 California Lead Plumbing Law Certified

This product has been tested and certified by IAPMO.



IAPMO LISTED




Sustainable Solutions International
Phone: 1 800 460 7019
www.sustainablesolutions.com

Kitchen Faucet / 2022 / V0

fluid | Sustainable Solutions

Installation Instructions for Kitchen Faucet



Please Keep This Manual For Future Reference


Tools Required for Installation



Allen Wrench (supplied)



Teflon Tape

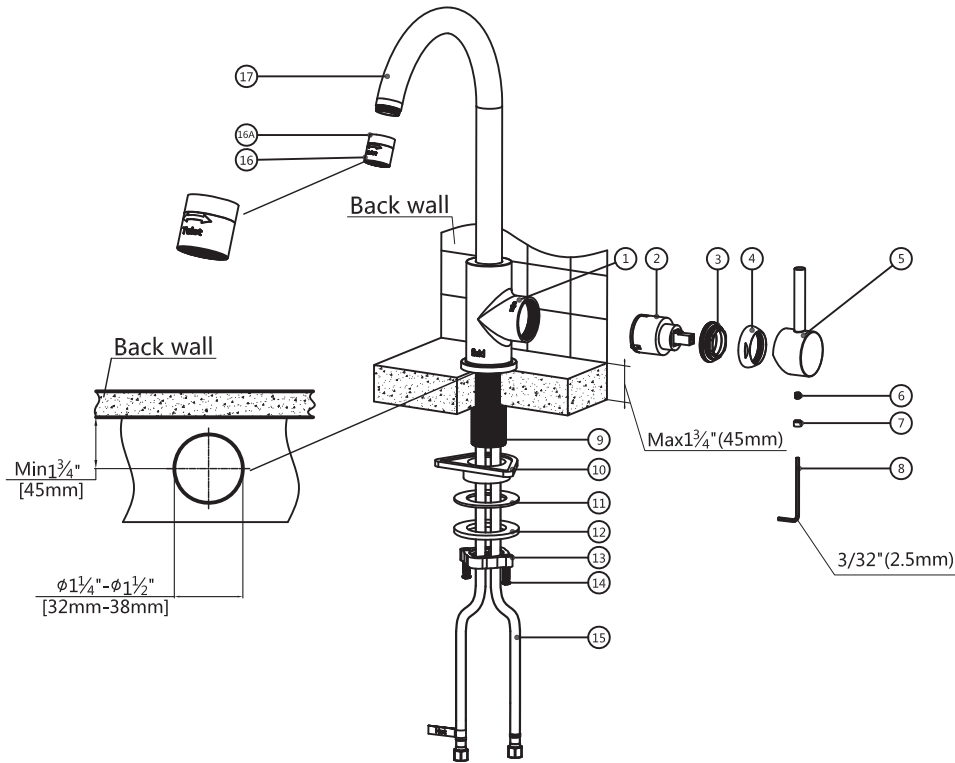

Specifications:

Max flow	1.8 gpm or 6.8 L/min @ 60 psi
Flow pressure	15 - 72.5 psi
Max pressure	120 psi
Max temperature	176 F or 80 C
Max deck thickness	2-1/8" (54mm)
Inlet connection	3/8" female compression

Installation Instructions

1. Shut off cold and hot water supplies.
2. On mounting surface the faucet hole should be between 1-1/4" (32mm) and 1-1/2" (38mm) in diameter. The center of the hole should be at least 1-3/4" (45mm) away from the back wall.
3. From above the deck, place faucet on the mounting surface by feeding the braided flex hoses (#15) and the mounting tube (#9) through the faucet hole on the mounting surface.
4. From below, fit spacer (#10), mounting rubber gasket (#11) and metal plate (#12) over mounting tube (#9).
NOTE: If spacer (#10) is omitted, mounting deck thickness can be increased by 5/8" (16mm) to a total of 2-3/8" (61mm).
5. Thread mounting plate (#13) onto the mounting tube (#9) by hand tightening to secure the spacer (#10), rubber gasket (#11) and metal gasket (#12) up against the bottom of the mounting surface. Tighten the two attached screws (#14) with a Phillips screwdriver.
6. Connect water supplies to the flex hose 3/8" Female Compression ends (#15). The hot water inlet connection is tagged with a HOT sticker.
7. Turn on cold and hot water supply lines and inspect all connections for leaks.

Dual Function Aerator Operation

Your fluid Kitchen Faucet comes with a dual function aerator. After turning on water, gently turn the aerator (#16) clockwise or counter clockwise to switch between an aerated water stream and the spray pattern.

Care & Maintenance Instructions

fluid products are designed and engineered under strict quality standards. Regular and proper care of our products will ensure years of trouble-free service.

For Cartridge:

To clean or replace the cartridge (#2), remove handle (#5) by removing silicon plug (#7) with the supplied Allen wrench (#8) and unscrewing set screw (#6). Then unscrew cap (#4) and remove nut (#3) with an adjustable wrench. Pull out the cartridge (#2) and clean or replace as required.

For Aerator:

Regularly remove the flow aerator (#16) and rinse with clean running water to ensure that any trapped debris has been removed. To remove flow aerator (#16), unscrew the top part of aerator (#16A) closewise by hand.

For Surface Finish:

To clean, wash with a soft cloth and warm soapy water, then rinse with clean water and dry with a soft cloth. Do not use abrasive or harsh cleaners as they may damage the finish.