# fluid

### **Specifications:**

- → Metal construction for durability and reliability
- → Pressure balancing volume control with 3-way two handle diverting
- → Maximum temperature limit stop for added safety
- > Integral stop check valves for easy maintenance
- → ADA compliant when alternate handle is chosen
- → Requires the fluid F1023B or F1003B pressure balancing valve, (sold separately and available with shut off or \*\*sharing in solder, PEX and PEX-W.)

### **Components:**

F1001T	. Cartridge Sleeve
FP6024041	. Blade Handle
FP801013	. Diverter Sleeve
FP605652	. Diverter Handle
FP6001142-PB	. Cover Plate
FP6016008	. 8″ Shower Arm
FP6000350	. 6" Shower Head
FP6001048	. Round Hand Shower
FA105	. Slide Bar
FP6002047	. Wall Outlet
FP6001006	. 60" Shower Hose
FP6057034	. Pipe Tub Spout

Kit with Alternate Handle: F243243T-AR





#### **Features:**



Requires non-diverting F1023B or F1003B valve



Integral Stops



Bubble Level



Speed Connect

## Citi Tub, 6" Shower Head & Hand Shower Trim Kit




Available in Polished Chrome (CP) and Brushed Nickel (BN)

<sup>\*\*</sup>sharing available where allowed by code

# fluid

### **Technical Drawing**

F243243T

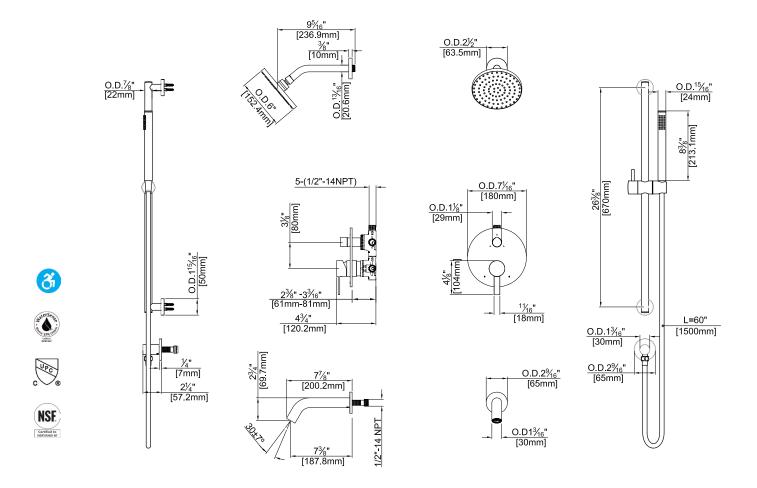

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed,

### **Warranty:**

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

### **Kit Variations:**



Kit with alternate ADA diverter handle: **F243243T-AR** 

#### Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Shower Head & Hand Shower @ 1.5 gpm: **F243243T-15**