

## Citi Tub & 5 Function Shower Trim, (Two handle)

F242005T

### Specifications:

- Metal construction for durability and reliability
- Pressure balancing volume control with 2-way diverter with shut off or sharing
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- ADA compliant when alternate handle below is selected
- Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or \*\*sharing in solder, PEX and PEX-W.)

### Components:

F1001T .....	Sleeve Tube and Cap
FP6024041 .....	Blade Handle
FP801013 .....	Diverter Sleeve
FP605652 .....	Diverter Handle
FP6001142-2PB .....	Round Cover Plate
FP20100 .....	5 Function Shower Head
FP6016008 .....	8" Shower Arm
FP6057034 .....	8" Pipe Tub Spout

Kit with Alternate Handle: **F242005T-AR**



Requires 2-Way diverting F1012B or F1022B valve



Bubble Level



Integral Stops




Speed Connect

Polished Chrome (CP), Brushed Nickel (BN) & Matte Black (MB)

## Technical Drawing

F242005T

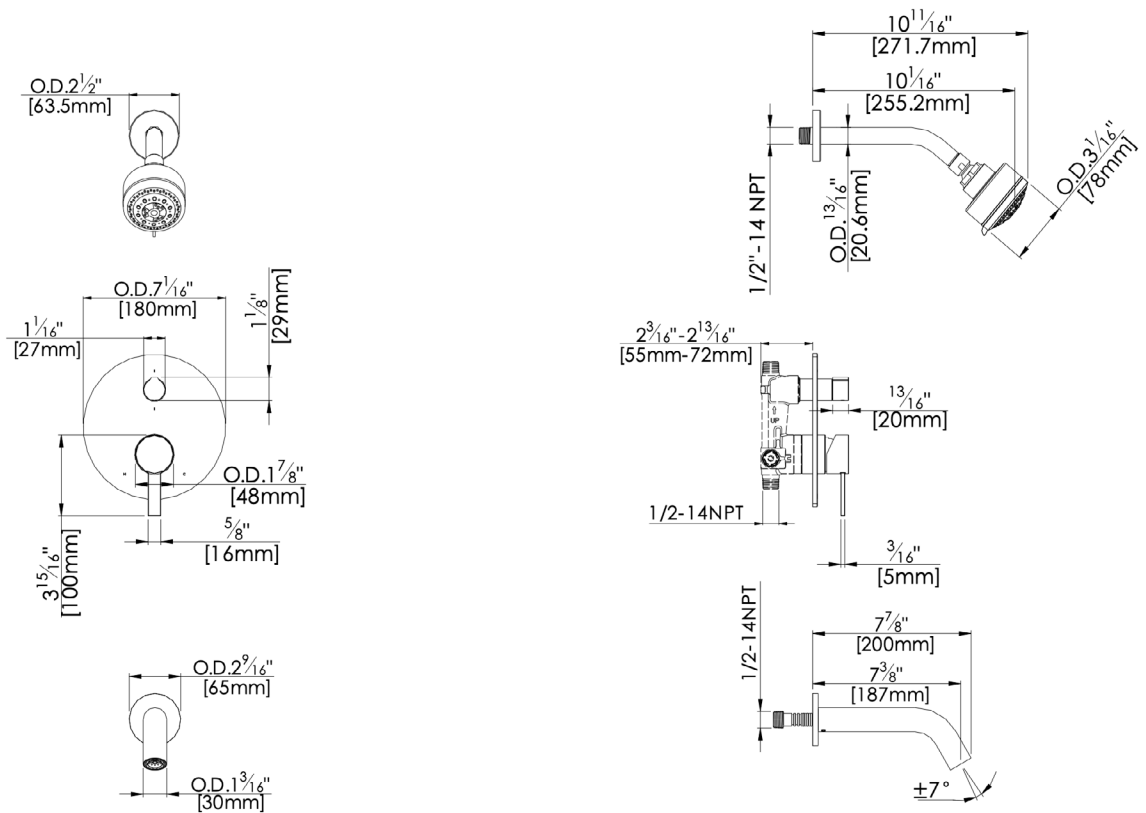

**Codes and Standards:** ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed

### Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

### Kit Variations:

Kit with round ADA diverter handle: [F242005T-AR](#)



Kit with square style cover plate & diverter handle: [F242005T-S](#)

### Flow Rate:

Shower Head 1.8 gpm @ 60 psig  
Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Shower Head  
@ 1.5 gpm: [F242005T-15](#)  
@ 1.0 gpm: [F242005T-10](#)