fluid

Specifications:

- → Metal construction for durability and reliability
- → Pressure balancing volume control with 2-way two handle diverting
- → Maximum temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → ADA compliant with alternate handle below
- → Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001T	Cartridge Sleeve
FP6024041	Blade Handle
FP801013	Diverter Sleeve
FP605752	Diverter Handle
FP6001143-2PB	Round Cover Plate
FP6016008	8" Shower Arm
FP6000350	6" Shower Head
FP40120	3 Function Hand Shower*
FA802	Slide Bar With Integral Outlet
FP6001006	60" Shower Hose*

Matte black version features the FP6001007MB Shower Hose & FP40130MB Hand Shower.

**sharing available where allowed by code

Kit with Alternate Handle: F242028T-AR





Features:



Requires 2-way diverting F1022B or F1012B valve



Integral Stops



Bubble Level



Speed Connect

Citi 6" Shower Head & 3 Function Hand Shower Trim Kit

F242028T



Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com


Toll free: 1-800-460-7019




fluid

Technical Drawing

F242028T

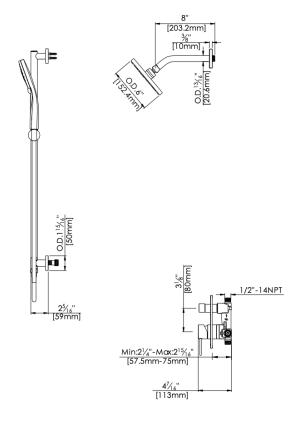

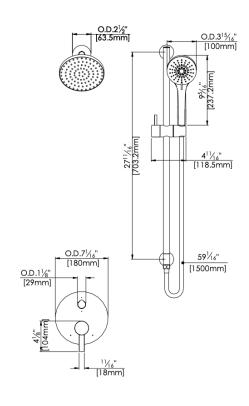





Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle: F242028T-AR

Kit with square style cover plate & diverter handle: F242028T-S

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Shower Head & Hand Shower @ 1.5 gpm: F242028T-15

F242028T February 2024

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

Toll free: 1-800-460-7019

