

Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing with 2-way, single handle diverting and temperature control
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)
- ➔ ADA Compliant

Components:

| | |
|---------------------|------------------------|
| F1001T | Cartridge Sleeve |
| FP6024041 | Blade Handle |
| FP6001035-2PS | Round Cover Plate |
| FP6016008 | 8" Shower Arm |
| FP20100 | 5 Function Shower Head |
| FP6001048 | Round Hand Shower |
| FA101 | Slide Bar |
| FP6082048 | Wall Outlet |
| FP6001006 | 60" Shower Hose |

Features:

 Requires 2-way diverting F1002B or F1042B valve

 Integral Stops  Bubble Level

 ADA

Citi 5-Function Shower Head & Hand Shower on Slide Bar


F244103T



Polished Chrome (CP) and Brushed Nickel (BN)

Technical Drawing

F244103T

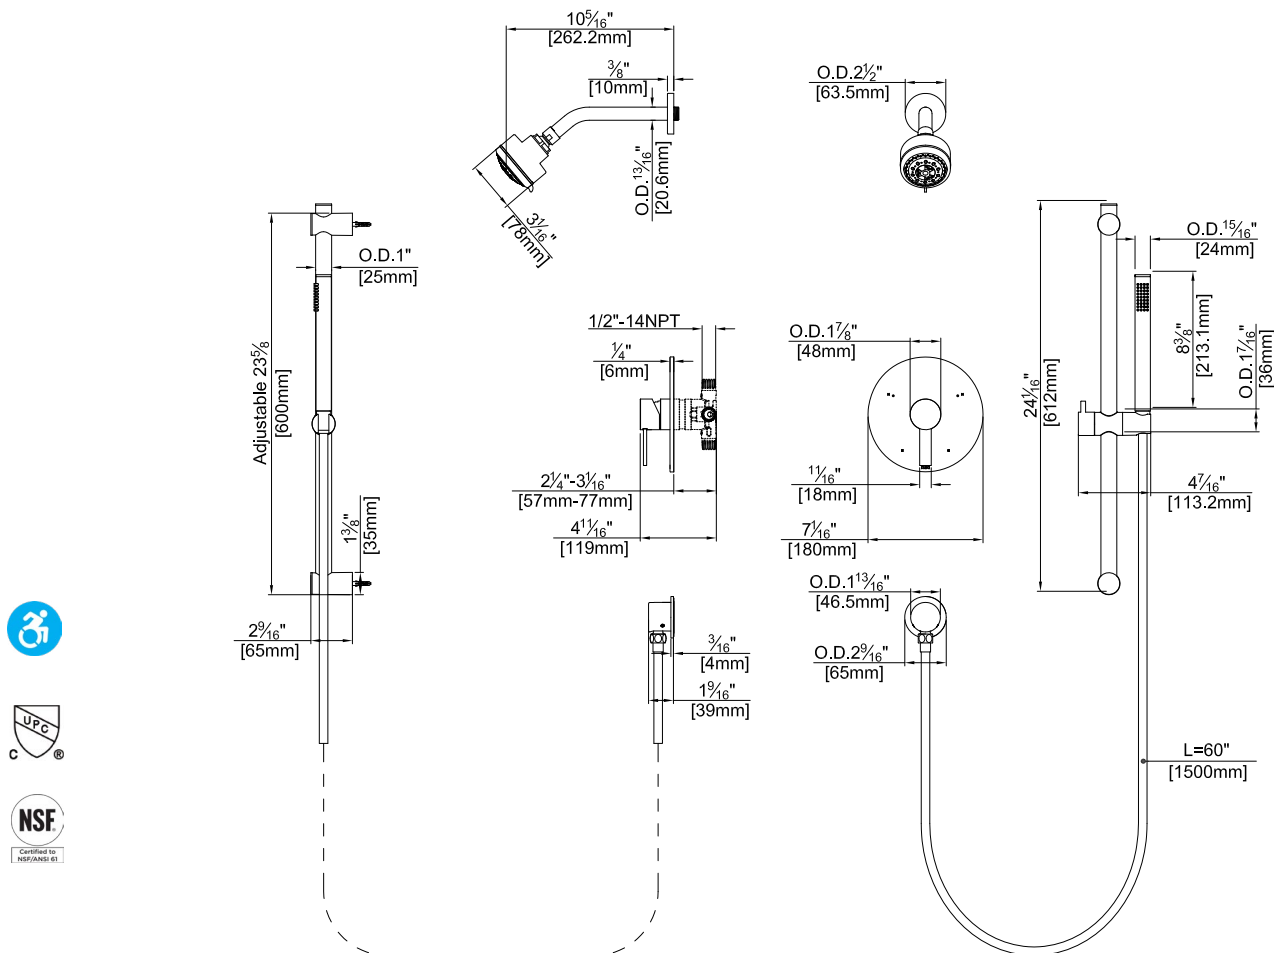

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with square style cover plate & diverter handle: [F244103T-S](#)

Flow Rate:

Shower Head 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Shower Head & Hand Shower @ 1.5 gpm: [F244103T-15](#)