fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing with 2-way single handle diverting and temperature control
- Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Valve and trim packages are sold separately
- Requires the fluid F1002B or the F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)
- ADA compliant

Components:

F1001T	Sleeve Tube and Cap
FP6024041	. Blade Handle
FP6001035-2PS	Round Cover Plate
FP20100	5-Function Shower Head
FP6016008	. 8″ Shower Arm
FP6098035L	. Curved Tub Spout

Citi Tub & 5 Function Shower Trim Kit, (Single Handle)


F244110T







Features:

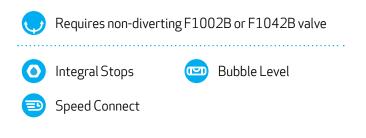

Polished Chrome (CP), Brushed Nickel (BN) & Matte Black (MB)

fluid by **Sustainable Solutions**


Email: help@sustainablesolutions.com **Toll free:** 1-800-460-7019 F244110TFebruary 2025

fluid

Technical Drawing

F244110T

pg 2.

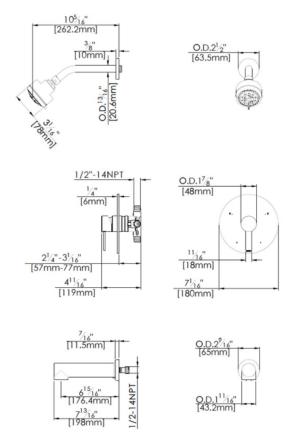

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed

Warranty:

3

30

NSF

Certified to NSF/ANSI 61

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with square style cover plate & diverter handle: F244110T-S

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Shower Head @ 1.5 gpm: F244110T-15

fluid by Sustainable Solutions

F244110TFebruary 2025