







Specifications:

- Metal construction for durability and reliability
- Brass spray head
- Angular swivel spout with 360 degree or 140 degree rotation with supplied stop
- Pull out and retractable magnet system
- Single handle operation allows both volume and temperature control
- Quality ceramic cartridge ensures life long trouble-free service
- Quick and easy installation with quick hose connector
- Dual function spray head with spray and aerated flow
- Limited to flow rate of 1.8 gpm (6.8 lpm) at 60 psi
- Max deck thickness 1 - 3/4" (45 mm) with spacer and 2 - 1/2" (63 mm) without spacer
- 1-1/2" (38 mm) faucet hole drilling is recommended
- 8" deck plate for 3 hole installation is available and sold separately
- Also available in Polished Chrom (CP) and PVD Stainless Steel (SS)
- ADA Compliant

Features:

-  Dual Spray Kitchen Faucet
-  Pull Down Kitchen Spout
-  Magnetic Docking
-  Ceramic Disk Cartridge
-  Metal construction
-  360 Degree Rotation with 140 Degree Lock

Pull Down Kitchen Faucet with Magnetic Spray Head-Matte Black



F820MB



Matte Black (MB)

Technical Drawing

F820MB

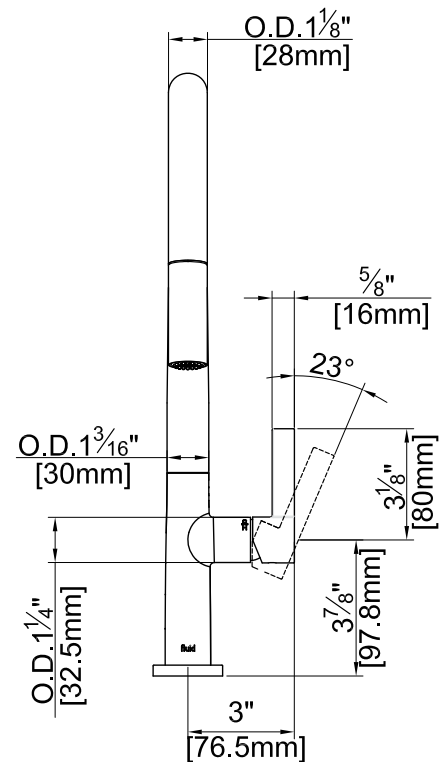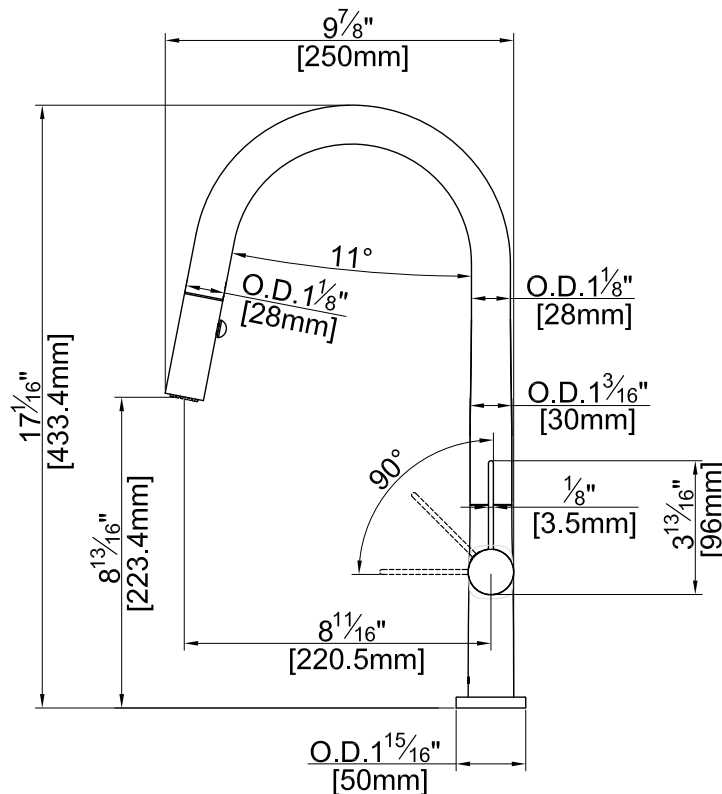

Warranty:

Limited Lifetime Faucet Warranty
against material and manufacturing
defects for residential use.

2 Year Limited Warranty on all industrial,
commercial and business applications.

Codes & Standards:

ANSI/ASME A112.18.1

CSA B125.1

NSF/ANSI/CAN 61: Q < 1

NSF / ANSI / CAN372

IAPMO / cUPC Listed

ADA Compliant

Flow Rate:

1.8 gpm (6.8 lpm) at 60 psi

Low Flow Alternative
@1.5 gpm (5.7 lpm) **F820-15**