fluid

Specifications:

- → Metal construction for durability and reliability
- → Pressure balancing volume control with 2-way, two handle diverting
- Maximum temperature limit stop for added safety
- > Integral stop check valves for easy maintenance
- → ADA compliant when alternate handle below is selected
- → Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:


F1001T	Cartridge Sleeve
FP6024041	Blade Handle
FP801013	Diverter Sleeve
FP605652	Diverter Handle
FP6001142-2PB	Round Cover Plate
FP6016008	8" Shower Arm
FP20100	5 Function Shower Head
FP6001048	Round Hand Shower
FA105	Slide Bar
FP6002047	Wall Outlet
FP6001006	60" Shower Hose


^{**}sharing available where allowed by code

Kit with Alternate Handle: F242204T-AR













Speed Connect

Citi Shower Head & Hand Shower on Slide Bar, (Two Handle)

F242204T



Polished Chrome (CP) and Brushed Nickel (BN)

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com


Toll free: 1-800-460-7019



fluid

Technical Drawing

F242204T

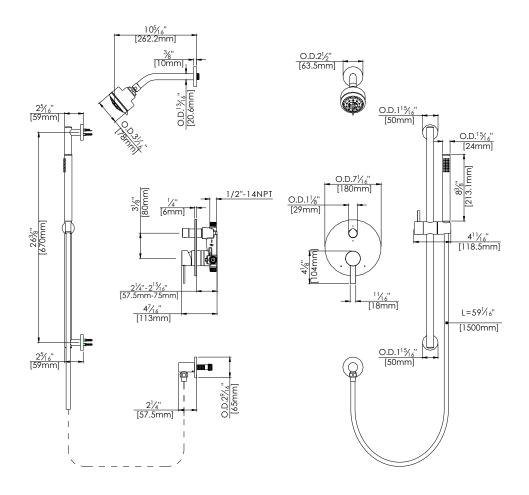





Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:

F242204T-AR

Kit with square style cover plate & diverter handle: **F242204T-S**

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Shower Head & Hand Shower @ 1.5 gpm: **F242204T-15**

F242204T March 2025

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

Toll free: 1-800-460-7019