fluid

Specifications:

- ➔ Metal construction for durability and reliability
- Pressure balancing volume control with 2-way, two handle diverting
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ ADA compliant when alternate handle below is selected
- Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001T	. Cartridge Sleeve
FP6024041	. Blade Handle
FP801013	. Diverter Sleeve
FP605652	. Diverter Handle
FP6001142-2PB	. Round Cover Plate
FP6016008	. 8" Shower Arm
FP20100	. 5 Function Shower Head
FP6001048	. Round Hand Shower
FA101	. Slide Bar
FP6002047	. Wall Outlet
FP6001004	. 72" Shower Hose

**sharing available where allowed by code

Kit with Alternate Handle: **F242004T-AR**



Features:



Requires 2-way diverting F1022B or F1012B valve

Bubble Level



Integral Stops

Speed Connect

Citi Shower Head & Hand Shower Trim Kit With FA105 (Two Handle)





Polished Chrome (CP) and Brushed Nickel (BN)

fluid by Sustainable Solutions


Email: help@sustainablesolutions.com **Toll free:** 1-800-460-7019 F242004T March 2025


fluid

Technical Drawing

F242004T

pg 2.

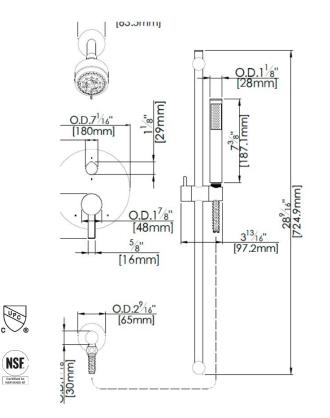

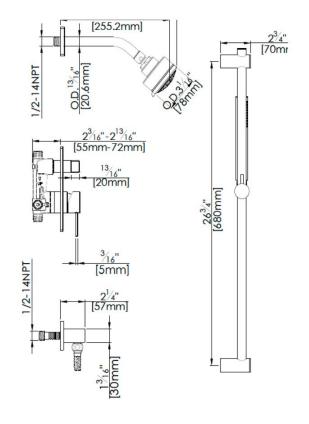

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle: **F242004T-AR**

Kit with square style cover plate & diverter handle: **F242004T-S**

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Shower Head & Hand Shower @ 1.5 gpm: **F242004T-15**

fluid by Sustainable Solutions

F242004T March 2025