

## Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing volume control
- ➔ Max-temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid F1001B or F1021B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

## Components:

F1001T .....	Sleeve Tube and Cap
FP6018041 .....	Utopia Handle
FP6001035-1PB .....	Round Cover Plate
FP6016008 .....	8" Shower Arm
FP20100 .....	5-Function Showerhead
FP6098034L .....	7.5" Curved Diverting Tub Spout

## Features:

 Requires non-diverting F1001B or F1021B valve

 Integral Stops  Bubble Level

 Slip Fit Connection

## Utopia 5-Function Showerhead and Diverting Tub Spout Trim Kit


F181020T



Polished Chrome (CP) and Brushed Nickel (BN)

## Technical Drawing

F181207T

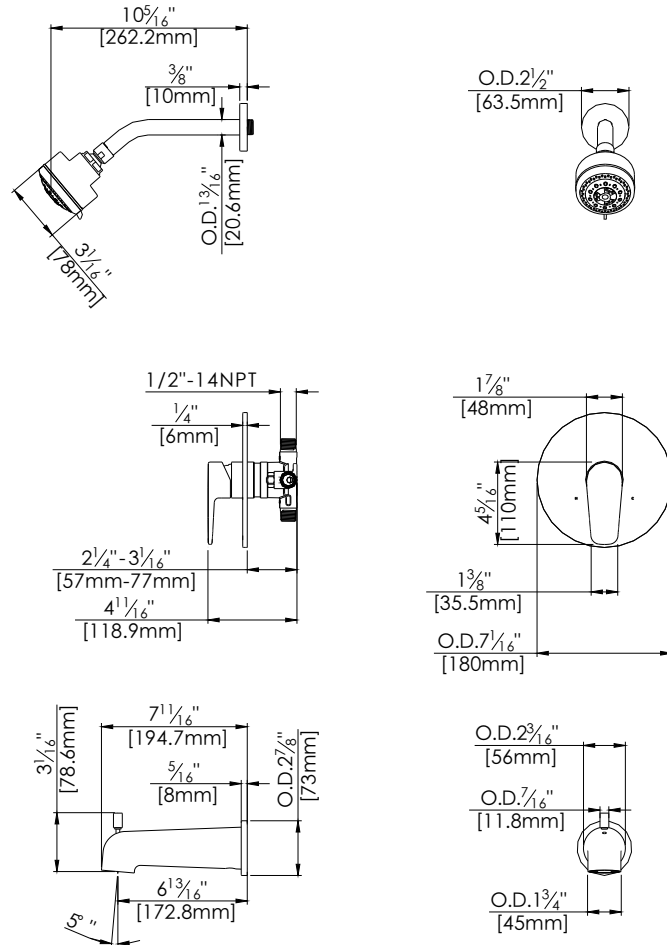

### Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

### Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

### Flow Rate:

Tub Spout 4.5 gpm @ 60 psig

Showerhead 1.8 gpm @ 60 psig

Low Flow Alternative: Showerhead @ 1.5 gpm: **F181207T-15**