


## Specifications:

- Metal construction for durability and reliability
- Pressure balancing, single handle diverting and temperature control
- Max-temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Requires the fluid F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

## Components:

F1001T .....	Sleeve Tube and Cap
FP6018041 .....	Utopia Handle
FP6001035-2PS .....	Round Cover Plate
FP6016008 .....	8" Shower Arm
FP20100 .....	5-Function Showerhead
FP6098035L .....	7.5" Curved Tub Spout

## Features:

 Requires 2-way diverting F1002B or F1042B valve

 Integral Stops  Bubble Level

 Slip Fit Connection

## Utopia 5-Function Showerhead and Curved Tub Spout Trim Kit


F184110T



Polished Chrome (CP) and Brushed Nickel (BN)

## Technical Drawing

F184110T

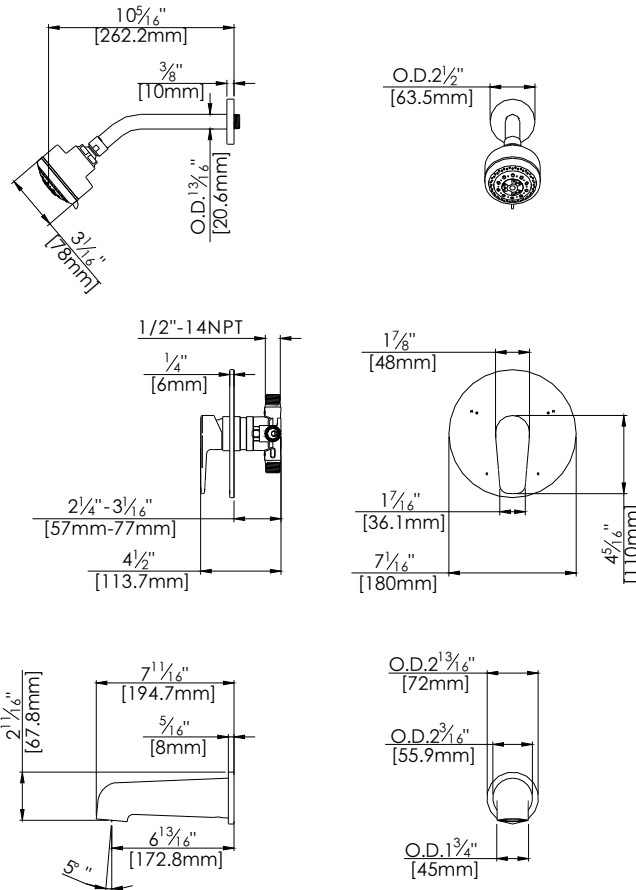

## Warranty:

Limited Lifetime Faucet Warranty  
against material and manufacturing  
defects for residential use.

2 Year Limited Warranty on all industrial,  
commercial and business applications.

## Codes and Standards:

ANSI/ASME A112.18.1  
CSA B125.1  
IAPMO / cUPC Listed  
ADA Compliant

## Flow Rate:

Tub Spout 4.5 gpm @ 60 psig  
Showerhead 1.8 gpm @ 60 psig

Low Flow Alternative: Showerhead @ 1.5  
gpm: **F184110T-15**