fluid

Specifications:

- Metal construction
- > Pressure balancing volume control with 2-way, two handle diverting
- → Maximum temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

| F1001T | . Sleeve tube and cap |
|---------------|--------------------------|
| FP6016041 | . Quad Handle |
| FP80101 | . Diverter Sleeve |
| FP605652 | . Diverter Handle |
| FP6001142-2PB | . Cover Plate |
| FP6016008 | . 8" Shower Arm |
| FP6000350 | . 6" Showerhead |
| FP40120 | . 3-Function Hand Shower |
| FA104 | . Brass Slide Bar |
| FP6002047 | . Wall Outlet |
| FP6001006 | . 60" Shower Hose |
| | |

sharing available where allowed by code Kit with Alternate Handle: **F162007T-AS





Features:

Requires 2-way diverting F1012B or F1022B valve





Bubble Level



Speed Connect

Quad Showerhead & Hand Shower Trim Kit on Slide Bar

F162007T





Polished Chrome (CP) and Brushed Nickel (BN)

fluid

Technical Drawing

F162007T

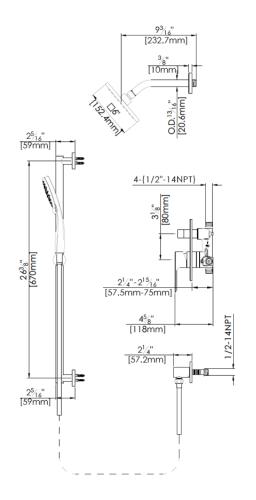

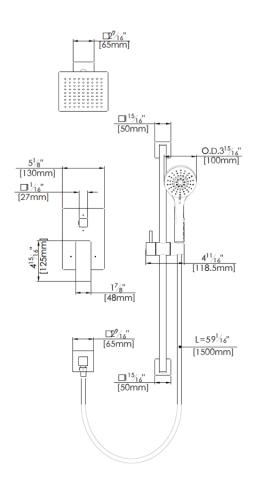







Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Showerhead & Hand Shower @ 1.5 gpm: **F162007T-15**