

Specifications:

- ➔ Metal construction
- ➔ Pressure balancing volume control with 2-way two handle diverting
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve Tube and Cap
FP801013	Diverter Sleeve
FP601143-2PB	Square Cover Plate
FP6007108	Square Diverter Handle
FP6016041	Quad Handle
FP6027008	8" Shower Arm
FP10130	4" Showerhead
FP6004048	Square Hand Shower
FA104	Slide Bar
FP6001047	Wall Outlet
FP6001006	60" Shower Hose

**sharing available where allowed by code

Kit with Alternate Handle: **F162012T-AS**




Features:

 Requires 2-way diverting F1012B or F1022B valve

 Integral Stops

 Bubble Level

 Speed Connect

Quad 4" Showerhead & Hand Shower Trim Kit


F162012T



Polished Chrome (CP) and Brushed Nickel (BN)

Technical Drawing

F162012T

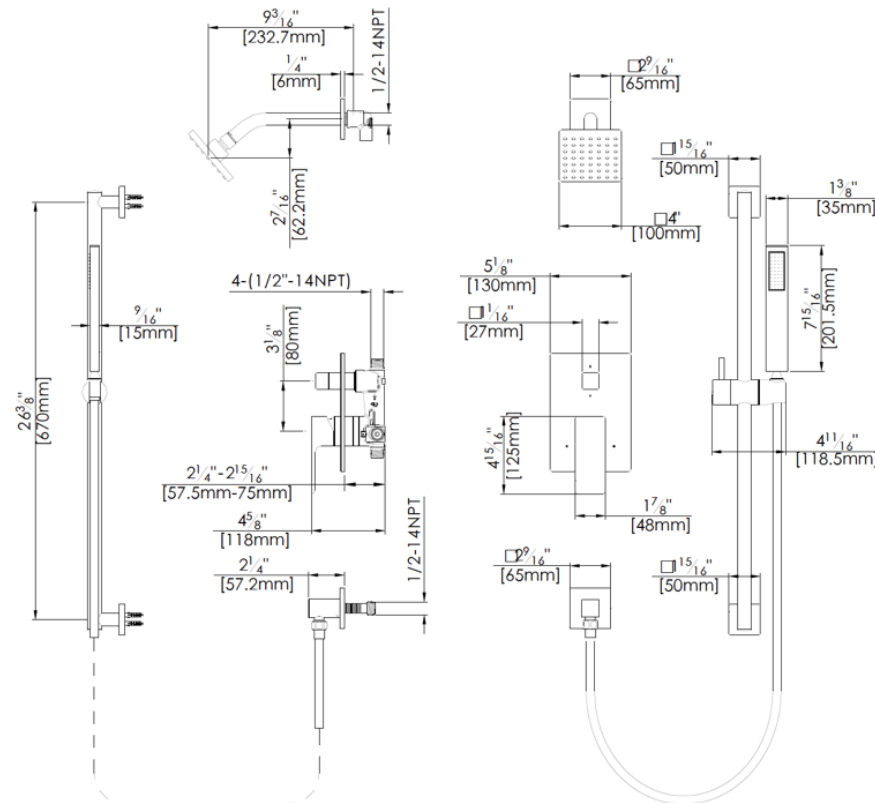

Warranty:

Limited Lifetime Faucet Warranty
against material and manufacturing
defects for residential use.

2 Year Limited Warranty on all industrial,
commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Showerhead and
Hand Shower @ 1.5 gpm: **F162012T-15**