

## Specifications:

- ➔ Metal construction
- ➔ Pressure balancing volume control with 2-way, two handle diverting
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or \*\*sharing in solder, PEX and PEX-W.)

## Components:

F1001T .....	Sleeve Tube and Cap
FP6016041 .....	Quad Handle
FP801013 .....	Diverter Sleeve
FP605752 .....	Diverter Handle
FP6001143-2PB .....	Square Cover Plate
FP6007108 .....	16" Shower Arm
FP6001150 .....	8" Square Rain Showerhead
FP40120 .....	3-Function Hand Shower*
FA803 .....	Slide Bar with Integral Outlet
FP6001006 .....	60" Shower Hose*

\*\*sharing available where allowed by code

Kit with Alternate Handle: **F162025T-ABS-AS**



## Features:


Requires 2-way diverting F1012B or F1022B valve

Integral Stops Bubble Level

Speed Connect

## Quad 8" Rain Showerhead & Hand Shower Trim Kit

F162025T-ABS

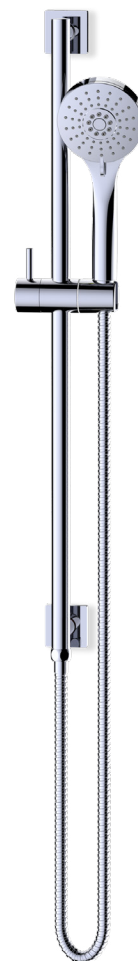


\* Matte Black: FP6001007MB Hose, FP40130MB 3-Function Hand Shower

Polished Chrome (CP), Brushed Nickel (BN) & Matte Black (MB)

## Technical Drawing

## F162025T-ABS

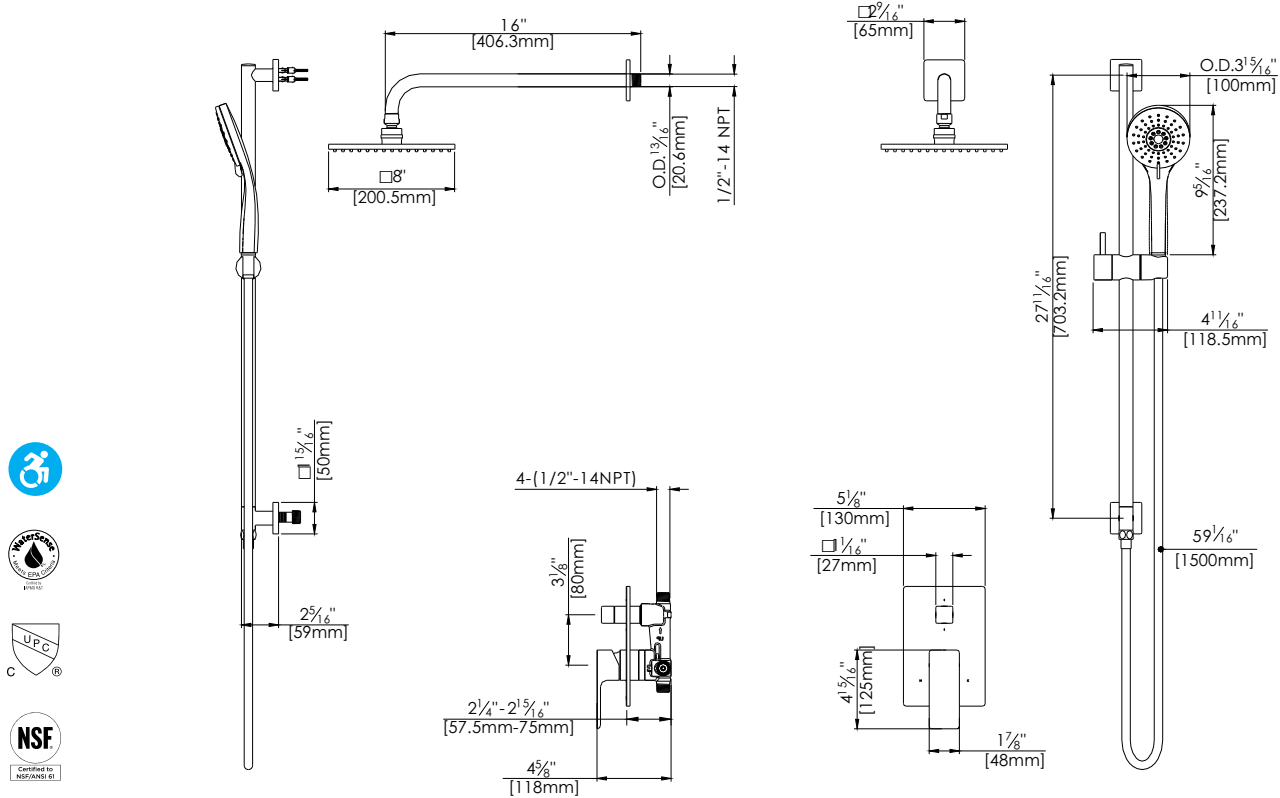

### Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.  
2 Year Limited Warranty on all industrial, commercial and business applications.

### Codes and Standards:

ANSI/ASME A112.18.1  
CSA B125.1  
IAPMO / cUPC Listed  
ADA Compliant  
EPA Watersense Listed (excluding MB Version)

### Flow Rate:

Showerhead 1.8 gpm @ 60 psig  
Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower  
@ 1.5 gpm: **F162025T-ABS-15**