

## Specifications:

- ➔ Metal construction
- ➔ Pressure balancing volume control with 3-way two handle diverting
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid F1003B or F1023B pressure balancing valve, (sold separately and available with shut off or \*\*sharing in solder, PEX and PEX-W.)

## Components:

|                     |                                |
|---------------------|--------------------------------|
| F1001T .....        | Sleeve Tube and Cap            |
| FP6016041 .....     | Quad Handle                    |
| FP801013 .....      | Diverter Sleeve                |
| FP605752 .....      | Diverter Handle                |
| FP6001143-3PB ..... | Square Cover Plate             |
| FP6021308 .....     | 3" Ceiling Shower Arm          |
| FP6001150 .....     | 8" Square Rain Showerhead      |
| FP40120 .....       | 3-Function Hand Shower         |
| FA803 .....         | Slide Bar With Integral Outlet |
| FP6001006 .....     | 60" Shower Hose                |
| FP6016034 .....     | Quad / Jovian Tub Spout        |

\*\*sharing available where allowed by code

Kit with Alternate Handle: **F163009T-ABS-AS**



## Features:

Requires 3-way diverting F1003B or F1023B valve

Integral Stops Bubble Level

Speed Connect

## Quad Tub, 8" Ceiling Rain Shower & Hand Shower Trim Kit


F163009T-ABS



Polished Chrome (CP) and Brushed Nickel (BN)

## Technical Drawing

F163009T-ABS

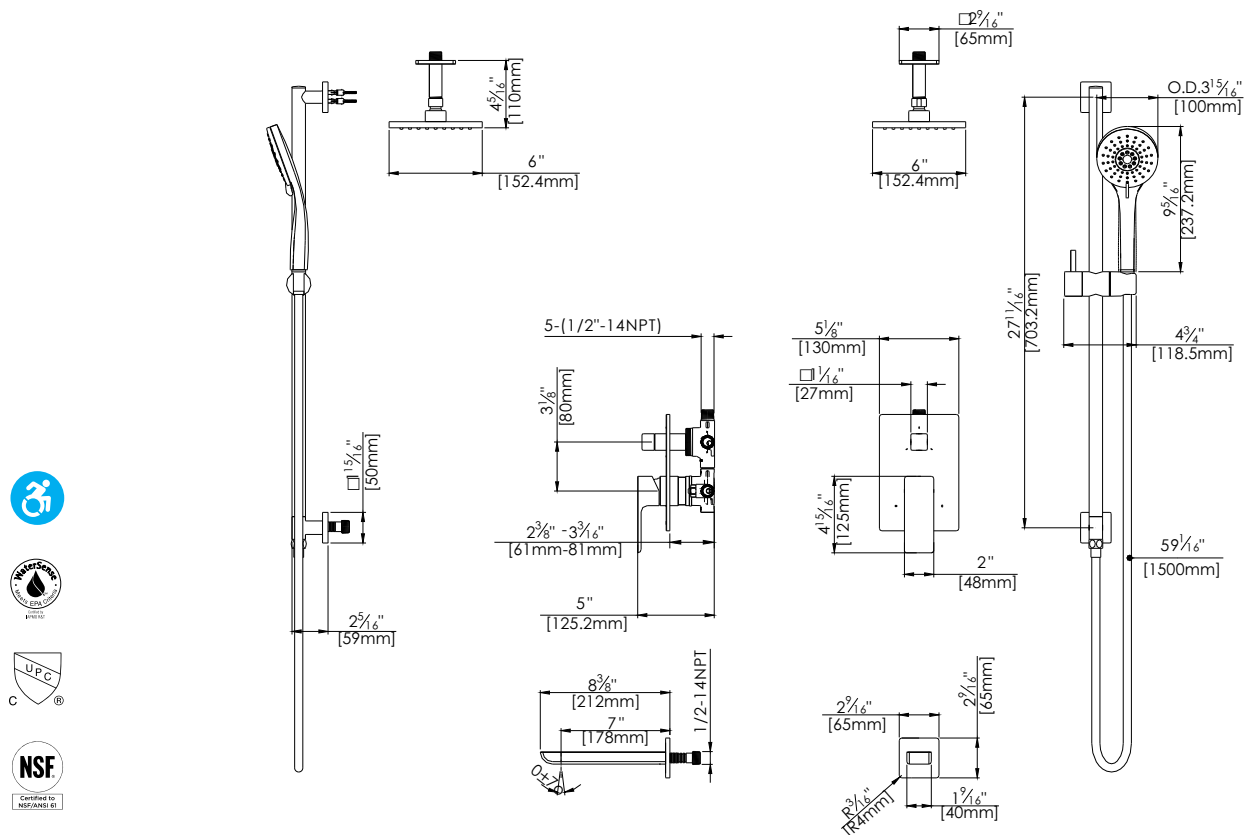

### Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.  
2 Year Limited Warranty on all industrial, commercial and business applications.

### Codes and Standards:

ANSI/ASME A112.18.1  
CSA B125.1  
IAPMO / cUPC Listed  
ADA Compliant  
EPA Watersense Listed

### Flow Rate:

Showerhead 1.8 gpm @ 60 psig  
Hand Shower 1.8 gpm @ 60 psig  
Tub spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower  
@ 1.5 gpm: **F163009T-ABS-15**