

Specifications:


- Metal construction for durability and reliability
- Pressure balancing with 2-way single handle diverting and temperature control
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Requires the fluid F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve Tube and Cap
FP6016041	Quad Handle
FP6001033-2PS	Square Cover Plate
FP20100	5-Function Showerhead
FP6027008	8" Shower Arm
FP6056034	Cubed Tub Spout

Quad Tub & 5-Function Shower Trim Kit, (Single Handle)


F164104T




Features:

 Requires 2-way diverting F1002B or F1042B valve

 Integral Stops


 Bubble Level

 Speed Connect

Polished Chrome (CP), Brushed Nickel (BN) & Matte Black (MB)

Technical Drawing

F164104T

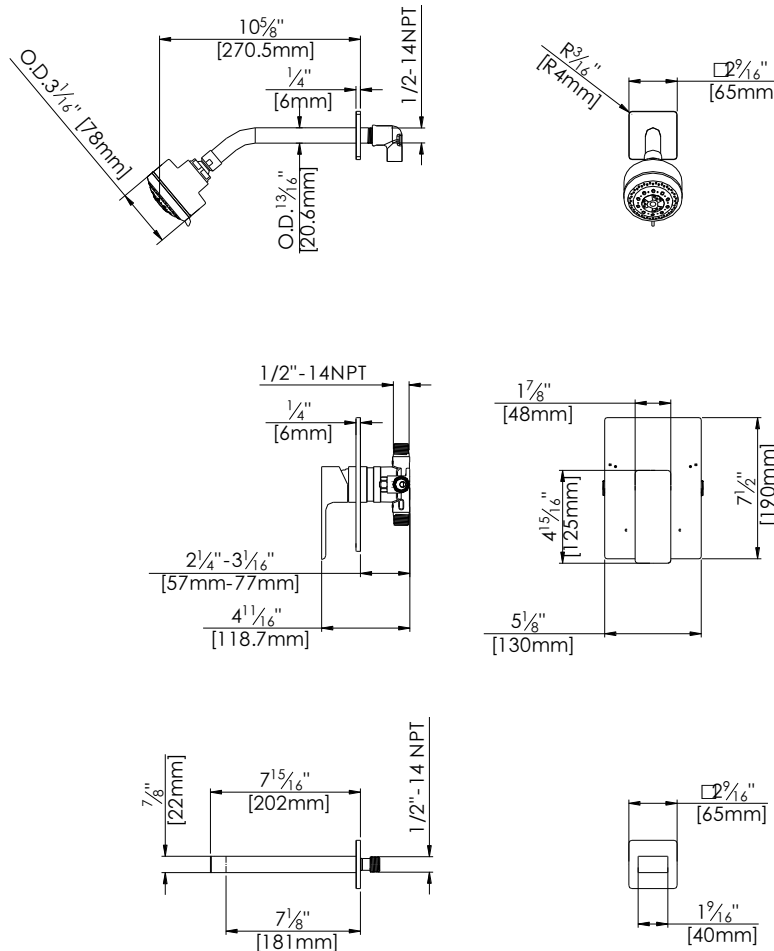

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1
CSA B125.1
IAPMO / cUPC Listed
ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig
Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Showerhead @ 1.5 gpm: **F164104T-15**