fluid

Specifications:

- Metal construction
- → Pressure balancing with 2-way single handle diverting and temperature control
- → Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- → Requires the fluid F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve tube and cap
FP6016041	Quad Handle
FP6001033-2PS	Square Cover Plate
FP6027008	8" Shower Arm
FP10130	4" Square Showerhead
FP40120	3-Function Hand Shower*
FA803	Slide Bar with Integral Outlet
FP6001006	60" Shower Hose*

* Matte Black kits feature the FP6001007MB Shower Hose & FP40130MB 3-Function Hand Shower

Features:



Requires 2-way diverting F1002B or F1042B valve



Integral Stops



Bubble Level



Speed Connect

Quad 4" Showerhead & Hand Shower Trim Kit

F164111T




Polished Chrome (CP), Brushed Nickel (BN) & Matte Black (MB)

fluid

Technical Drawing

F164111T

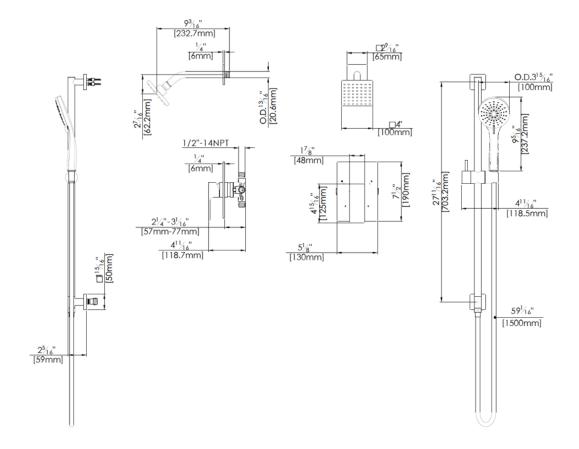

Warranty:

NSF.

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant EPA Watersense Listed (excluding MB Version)

Flow Rate:

Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower & Showerhead @ 1.5 gpm: **F164111T-15**