

Specifications:

- Metal construction for durability and reliability
- Pressure balancing volume control
- Max-temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Requires the fluid F1001B or F1021B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001T	Cartridge Sleeve
FP6016041	Quad Handle
FP6001033-1PB	Square Cover Plate
FP20100	5-Function Showerhead
FP6027008	8" Shower Arm
FP6098034L	Curved Diverting Tub Spout

Quad Curved Diverting Tub Spout & 5-Function Shower Trim Kit


F161209T



Features:

 Requires non-diverting F1001B or F1021B valve

 Integral Stops


 Bubble Level

 Slip Fit

Polished Chrome (CP) , Brushed Nickel (BN) & Matte Black (MB)

Technical Drawing

F161209T

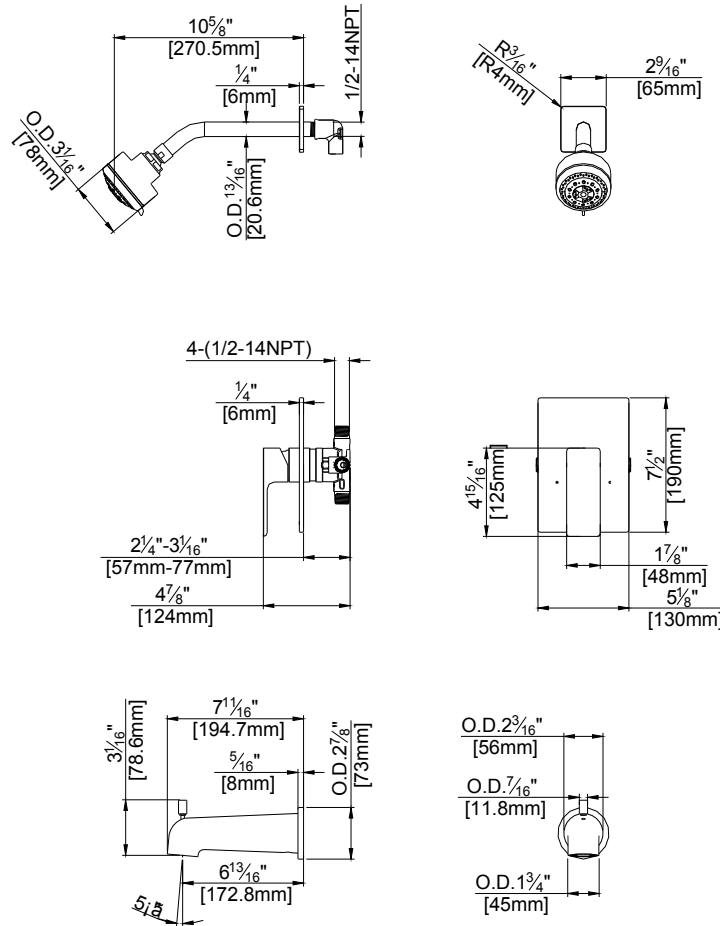

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1
CSA B125.1
IAPMO / cUPC Listed

Flow Rate:

Showerhead 1.8 gpm @ 60 psig
Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Showerhead @ 1.5 gpm: **F161209T-15**