

Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing, single handle diverting and temperature control
- ➔ Max-temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001T	Cartridge Sleeve
FP6016041	Quad Handle
FP6001033-2PS	Square Cover Plate
FP10130	4" Square Showerhead
FP6027008	8" Shower Arm
FP6098035L	Curved Tub Spout

Features:

 Requires 2-way diverting F1002B or F1042B valve

 Integral Stops  Bubble Level

 Slip Fit

Quad Curved Tub Spout & 4" Shower Trim Kit


F164112T



Polished Chrome (CP) , Brushed Nickel (BN) & Matte Black (MB)

Technical Drawing

F164112T

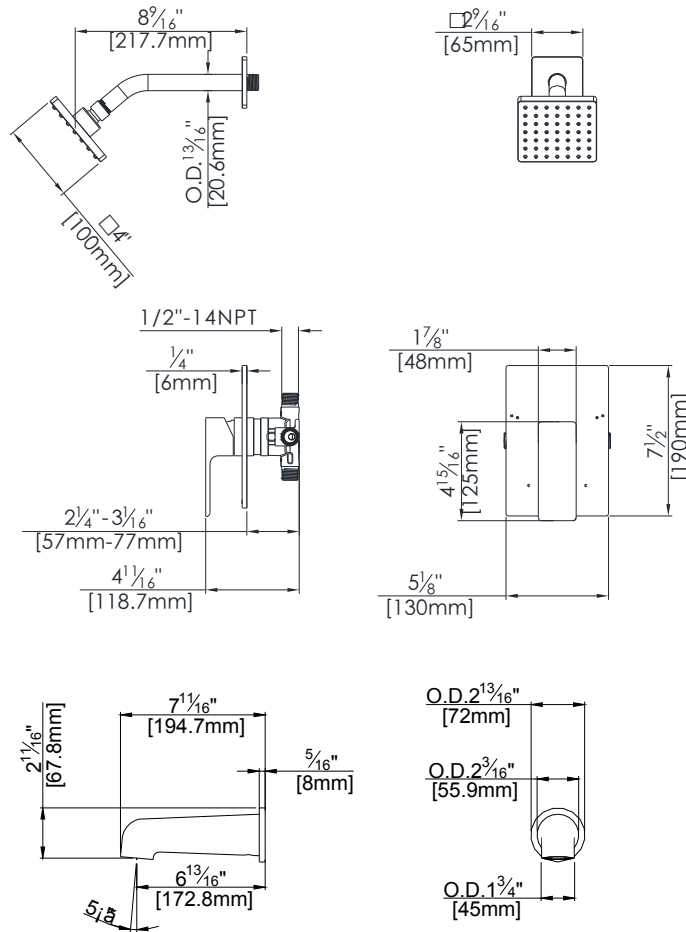

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1
CSA B125.1
IAPMO / cUPC Listed
ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig
Tub Spout 4.5 gpm @ 60 psig
Low Flow Alternative: Showerhead @ 1.5 gpm: **F164112T-15**