fluid

Specifications:

- → Metal construction for durability and reliability
- → Pressure balancing volume control
- → Maximum temperature limit stop for added safety
- > Integral stop check valves for easy maintenance
- → Requires the fluid F1001B or F1021B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:


F1001T	. Sleeve Tube and Cap
FP6028341	. Wisdom Handle
FP6001035-1PB	Round Cover Plate
FP900216	16" Switch Shower Arm
FP6002150	8" Rain Showerhead
FP40120	3-Function Round Hand Shower*
FP933000	Switch Slide Bar
FP6001006	60" Shower Hose*
FP6098034L	Curved Diverting Tub Spout

Matte black uses an FP6001007MB Shower Hose & FP40130MB 3-Function Hand Shower

Features:







Speed Connect

Wisdom Switch Tub, 8" Rain Shower & Hand Shower Trim Kit

F281017T





Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)

fluid

Technical Drawing

F281017T

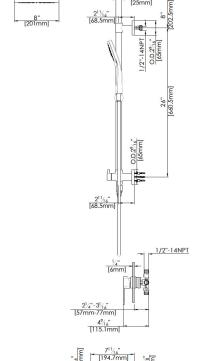









Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant EPA Watersense Listed (excluding MB Version)

Flow Rate:

Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F281017T-15**