fluid

Specifications:

- → Metal construction for durability and reliability
- ➔ Pressure balancing volume control
- ➔ Max-temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- → Requires the fluid F1001B or F1021B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001TSleeve Tube and CapFP6028341Wisdom HandleFP6001035-1PBCover PlateFP60003506" Shower headFP60160088" Shower Arm

Wisdom 6" Round Shower Only Trim Kit

F281037T





Features:



🗿 Integral Stops

📼 🛛 Bubble Level

Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)

fluid by Sustainable Solutions

F281037T March 2025


fluid


Technical Drawing

F281037T

pg 2.





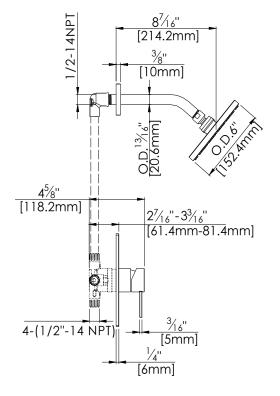

NSF. Certified to NSF/ANSI 61

3

UPC

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @60 psig

Low Flow Alternative: Showerhead @ 1.5 gpm: **F281037T-15**