fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 2-way, two handle diverting
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → ADA compliant with Alternate Handle below
- → Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

E1 001 E	S. T. 10
F1001T	Sleeve Tube and Cap
FP6028341	Wisdom Handle
FP801013	Diverter Sleeve
FP605652	Diverter Handle
FP6001142-2PB	Cover Plate
FP6016008	8" Shower Arm
FP10200	4" Eco Showerhead
FP6016008	8" Shower Arm
FP6001048	Round Hand Shower
FA105	Slide Bar
FP6002047	Wall Outlet
FP6001006	60" Shower Hose

Kit with Alternate Handle: F282012T-AR





Features:







Bubble Level



Speed Connect

Wisdom 4" Eco Showerhead & Hand Shower Trim Kit

F282012T



Polished Chrome (CP) and Brushed Nickel (BN)

**sharing available where allowed by code

fluid


Technical Drawing

F282012T

O.D.1½" [28mm]

4⁷/₁₆" [113.2mm]

 $L=59^{1}/16''$ [1500mm]

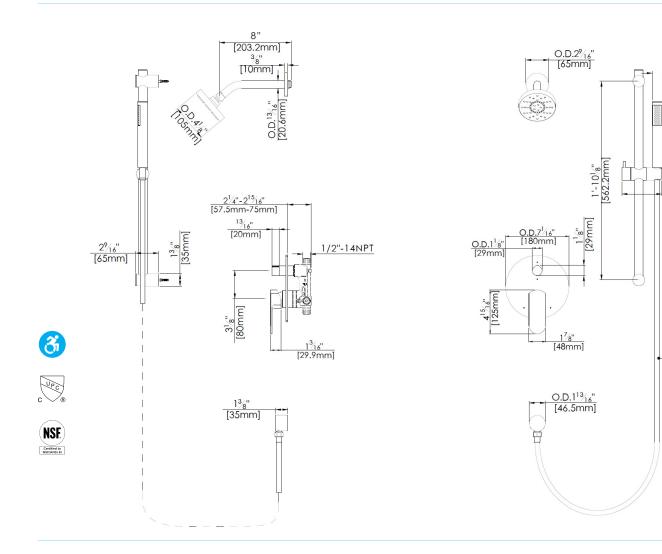

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant

Flow Rate:

Showerhead 1.5 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Showerhead & Hand Shower @ 1.5 gpm: **F282012T-15**