fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 2-way, two handle diverting
- → Max-temperature limit stop for added safety
- > Integral stop check valves for easy maintenance
- → ADA compliant with Alternate Handle below
- → Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve Tube and Cap
FP6028341	Wisdom Handle
FP801013	Diverter Sleeve
FP605652	Diverter Handle
FP6001142-2PB	Round Cover Plate
FP6006008	16" Shower Arm
FP6002150	8" Rain Showerhead
FP40120	3-Function Hand Shower*
FA802	Slide Bar with Integral Outlet
FP6001006	60" Shower Hose*

**sharing available where allowed by code

Kit with Alternate Handle: F282025T-ABS-AR





Wisdom 8" Rain Showerhead & Hand Shower Trim Kit

F282025T-ABS















Bubble Level



Speed Connect


Matte Black: FP6001007MB Hose, FP40130MB 3-Function Hand Shower


Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)

fluid

Technical Drawing

F282025T-ABS

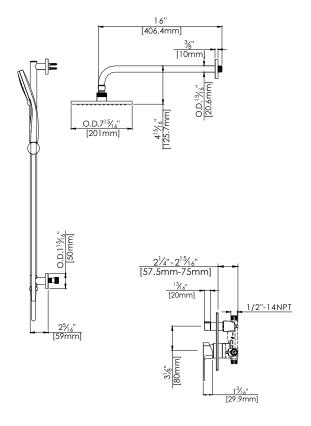

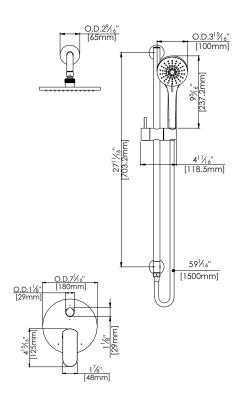





Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant EPA Watersense Listed (excluding MB Version)

Flow Rate:

Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F282025T-ABS-15**