

Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing volume control with 2-way, two handle diverting
- ➔ Max-temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ ADA compliant with Alternate Handle below
- ➔ Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve Tube and Cap
FP6028341	Wisdom Handle
FP801013	Diverter Sleeve
FP605752	Diverter Handle
FP6001143-2PB	Round Cover Plate
FP6016008	8" Shower Arm
FP6000350	6" Showerhead
FP40120	3-Function Hand Shower
FA802	Slide Bar With Integral Outlet
FP6001006	60" Shower Hose*

**sharing available where allowed by code


Kit with Alternate Handle: **F282028T-AR**



Features:

 Requires 2-way diverting F1012B or F1022B valve

 Integral Stops  Bubble Level

 Speed Connect

Wisdom 6" Showerhead & 3-Function Hand Shower Trim Kit

F282028T




* Matte Black: FP6001007MB Hose, FP40130MB 3-Function Hand Shower

Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)

Technical Drawing

F282028T

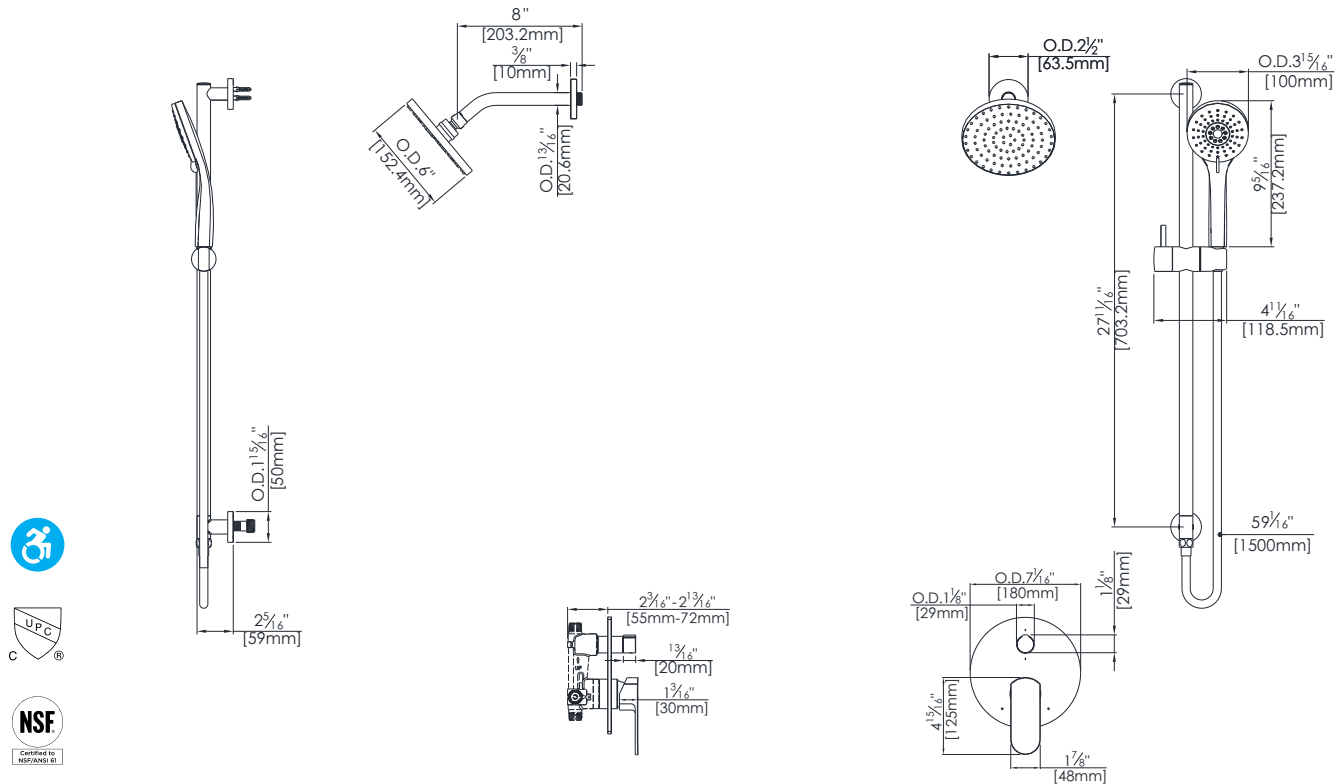

Warranty:

Limited Lifetime Faucet Warranty
against material and manufacturing
defects for residential use.

2 Year Limited Warranty on all industrial,
commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower &
Showerhead @ 1.5 gpm: **F282028T-15**