fluid

Specifications:

- → Metal construction for durability and reliability
- → Pressure balancing volume control with 2-way, single handle diverting
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Requires the fluid F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve Tube and Cap
FP6028341	Wisdom Handle
FP6001035-2PS	Round Cover Plate
FP6000350	6" Showerhead
FP6016008	8" Shower Arm
FP6001048	Hand Shower Wand
FP6001010	Hand Shower Holder
FP6082048	Wall Outlet
FP6001006	60" Shower Hose

Features:



Requires 2-way diverting F1002B or F1042B valve



Integral Stops



Bubble Level



Speed Connect

Wisdom 6" Showerhead & Hand Shower Trim Kit

F284101T




Polished Chrome (CP) and Brushed Nickel (BN)

fluid

Technical Drawing

F284101T

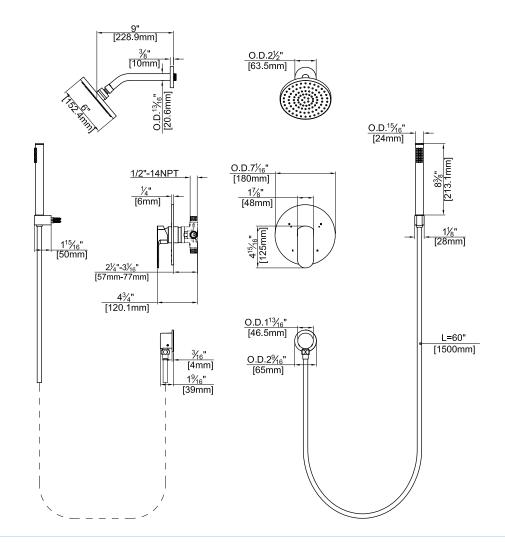







Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Showerhead & Hand Shower @ 1.5 gpm: **F284101T-15**