fluid


Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 2-way, single handle diverting
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Requires the fluid F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve Tube and Cap
FP6028341	Wisdom Handle
FP6001035-2PS	Round Cover Plate
FP6016008	8" Shower Arm
FP20100	5-Function Showerhead
FP6001048	Round Hand Shower
FA101	Slide Bar
FP6082048	Wall Outlet
FP6001006	60" Shower Hose

Features:







Bubble Level



Speed Connect

Wisdom 5-Function Shower Head & Hand Shower Trim Kit

F284103T




Polished Chrome (CP) and Brushed Nickel (BN)

fluid

Technical Drawing

F284103T

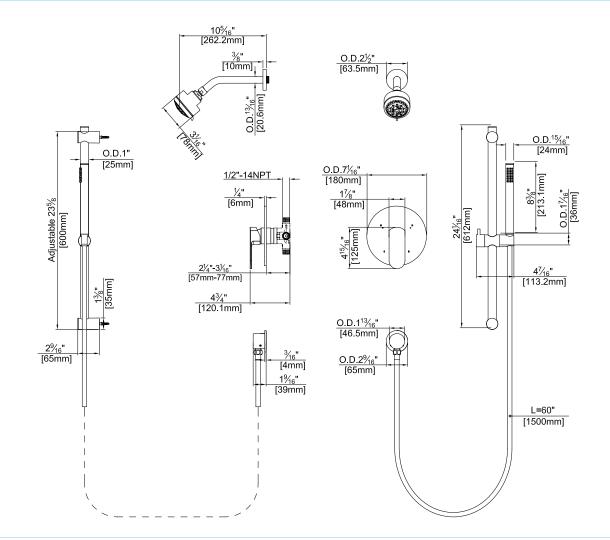

Warranty:

NSF.

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Showerhead & Hand Shower @ 1.5 gpm: **F284103T-15**