fluid

Specifications:

- → Metal construction for durability and reliability
- → Pressure balancing volume control
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Requires the fluid F1001B or F1021B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

Cartridge Sleeve
Wisdom Handle
Round Cover Plate
3-Function Hand Shower
Slide Bar
Wall Outlet
60" Shower Hose

 Matte black uses an FP6001007MB Shower Hose & FP40130MB 3-Function Hand Shower

Wisdom Hand Shower on FA101 Slide Bar Trim Kit

F281011T



Features:



Requires non-diverting F1001B or F1021B valve



Integral Stops



Bubble Level

Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)

fluid


Technical Drawing

F281011T

O.D.3¹⁵/₁₆" [100mm]

4⁷/₁₆" [113.2mm]

L=60"

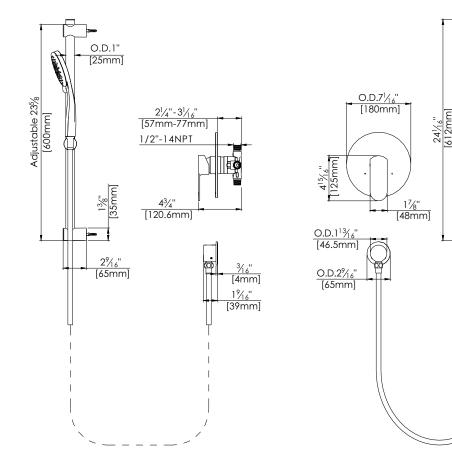

Warranty:

NSF.

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed EPA Watersense Listed (excluding MB Version) ADA Compliant

Flow Rate:

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F281011T-15**