

Specifications:

- → Metal construction for durability and reliability
- → Pressure balancing volume control
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Requires the fluid F1001B or F1021B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

| F1001T | Cartridge Sleeve |
|---------------|---------------------------------|
| FP6028341 | Wisdom Handle |
| FP6001035-1PB | Round Cover Plate |
| FP900208 | 8" Switch Shower Arm |
| FP10120 | 4" Showerhead |
| FP40120 | 3-Function Hand Shower |
| F933002 | 18" Switch Slide Bar |
| FP6001006 | 60" Shower Hose |
| FP6098034L | 7.5" Curved Diverting Tub Spout |

Matte black uses an FP6001007MB Shower Hose & FP40130MB 3-Function Hand Shower

Features:



Requires non-diverting F1001B or F1021B valve



Integral Stops



Bubble Level

Wisdom 18" Switch, Tub & 4" Showerhead Trim Kit

F281217T-18








Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)

fluid

Technical Drawing

F281217T-18

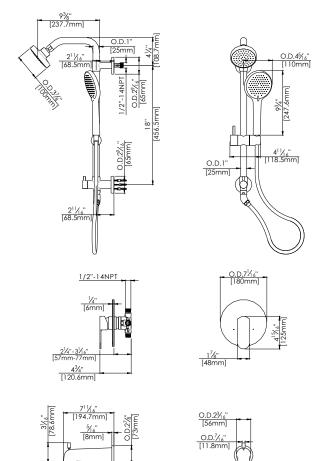





Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed

Flow Rate:

Hand Shower & Showerhead 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig Low Flow Alternative: Hand Shower & Showerhead @ 1.5 gpm:

F281217T-18-15