

Specifications:

- Metal construction for durability and reliability
- Pressure balancing single handle diverting and volume control
- Max-temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Requires the fluid F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve Tube and Cap
FP6028341	Wisdom Handle
FP6001035-1PB	Round Cover Plate
FP6098035L	7.5" Curved Tub Spout
FP6016008	8" Shower Arm
FP10120	4" Round Showerhead

Wisdom Curved Tub Spout & 4" Showerhead Trim Kit

F284107T



Features:



Requires 2-way diverting F1002B or F1042B valve



Integral Stops



Bubble Level




Slip Fit Connection

Polished Chrome (CP) , Brushed Nickel (BN) & Matte Black (MB)

Technical Drawing

F284107T

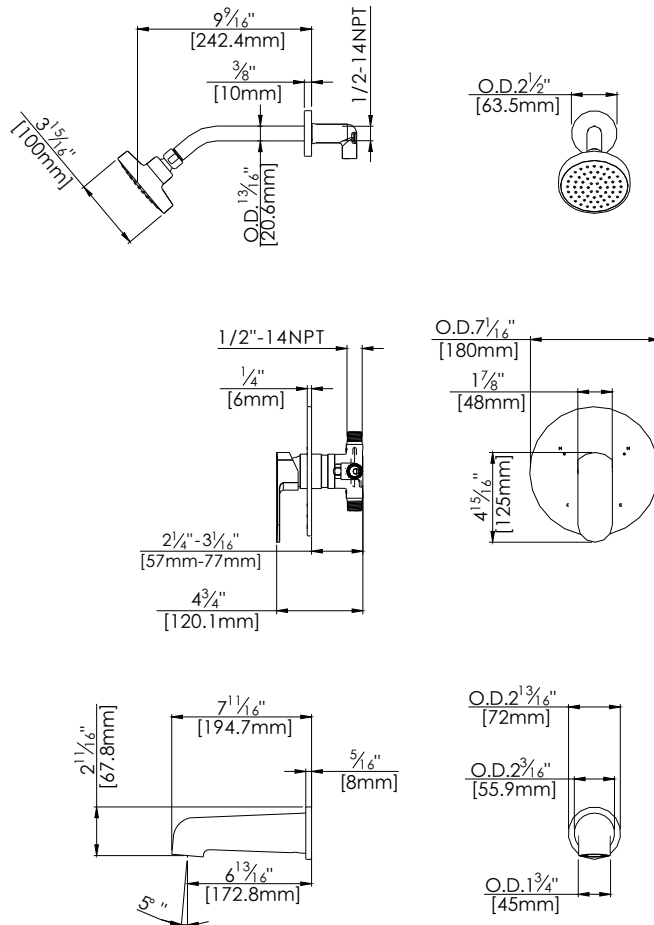

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1
CSA B125.1
IAPMO / cUPC Listed
ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig
Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Showerhead @ 1.5 gpm: **F284107T-15**