

Yaletown Hand Shower on Slide Rail Trim Kit

F191011T

Specifications:

- Metal construction for durability and reliability
- Pressure balancing volume control
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Requires the fluid F1001B or F1021B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:


F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP6001035-1PB	Round Cover Plate
FA101	Slide Rail
FP6082048	Round Wall Outlet
FP40120	3-Function Hand Shower
FP6001006	60" Shower Hose*



Features:

 Requires non-diverting F1001B or F1021B valve


 Integral Stops  Bubble Level

 Speed Connect

Polished Chrome (CP) and Brushed Nickel (BN)

Technical Drawing

F191011T

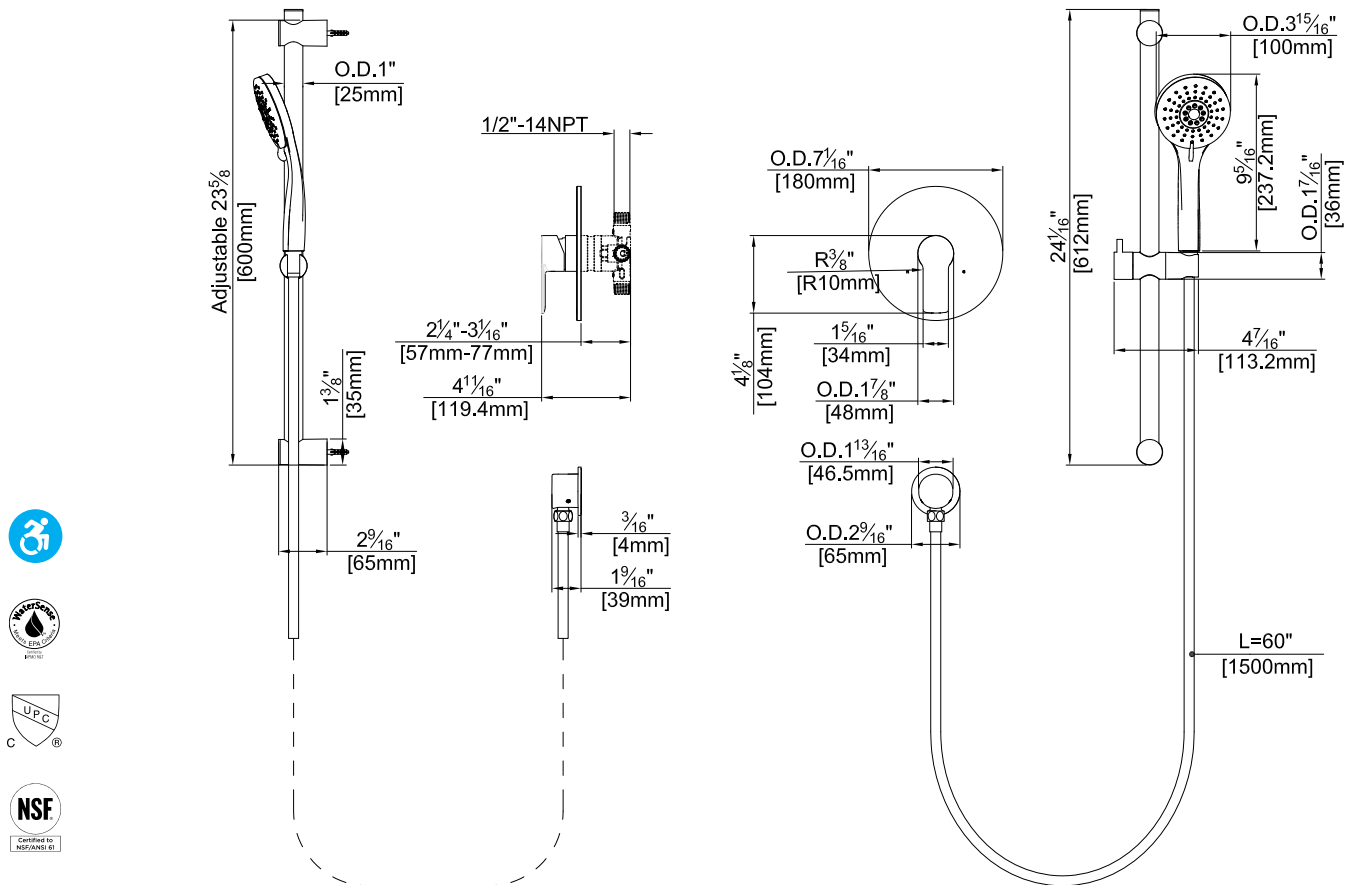

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1
CSA B125.1
IAPMO / cUPC Listed
EPA Watersense Listed
ADA Compliant

Flow Rate:

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower
@ 1.5 gpm: **F191011T-15**