

Specifications:

- Metal construction for durability and reliability
- Pressure balancing volume control
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Requires the fluid F1001B or F1021B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX.)


Components:

F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP6001035-1PB	Round Cover Plate
FA101	Slide Rail
FP6082048	Round Wall Outlet
FP40120	3-Function Hand Shower
FP6001006	60" Shower Hose
FP6055034	Round Diverting Tub Spout

Features:

 Requires non-diverting F1001B or F1021B valve

 Integral Stops  Bubble Level

 Speed Connect

Yaletown Hand Shower on Slide Rail Trim Kit


F191239T



Polished Chrome (CP) and Brushed Nickel (BN)

Technical Drawing

F191239T

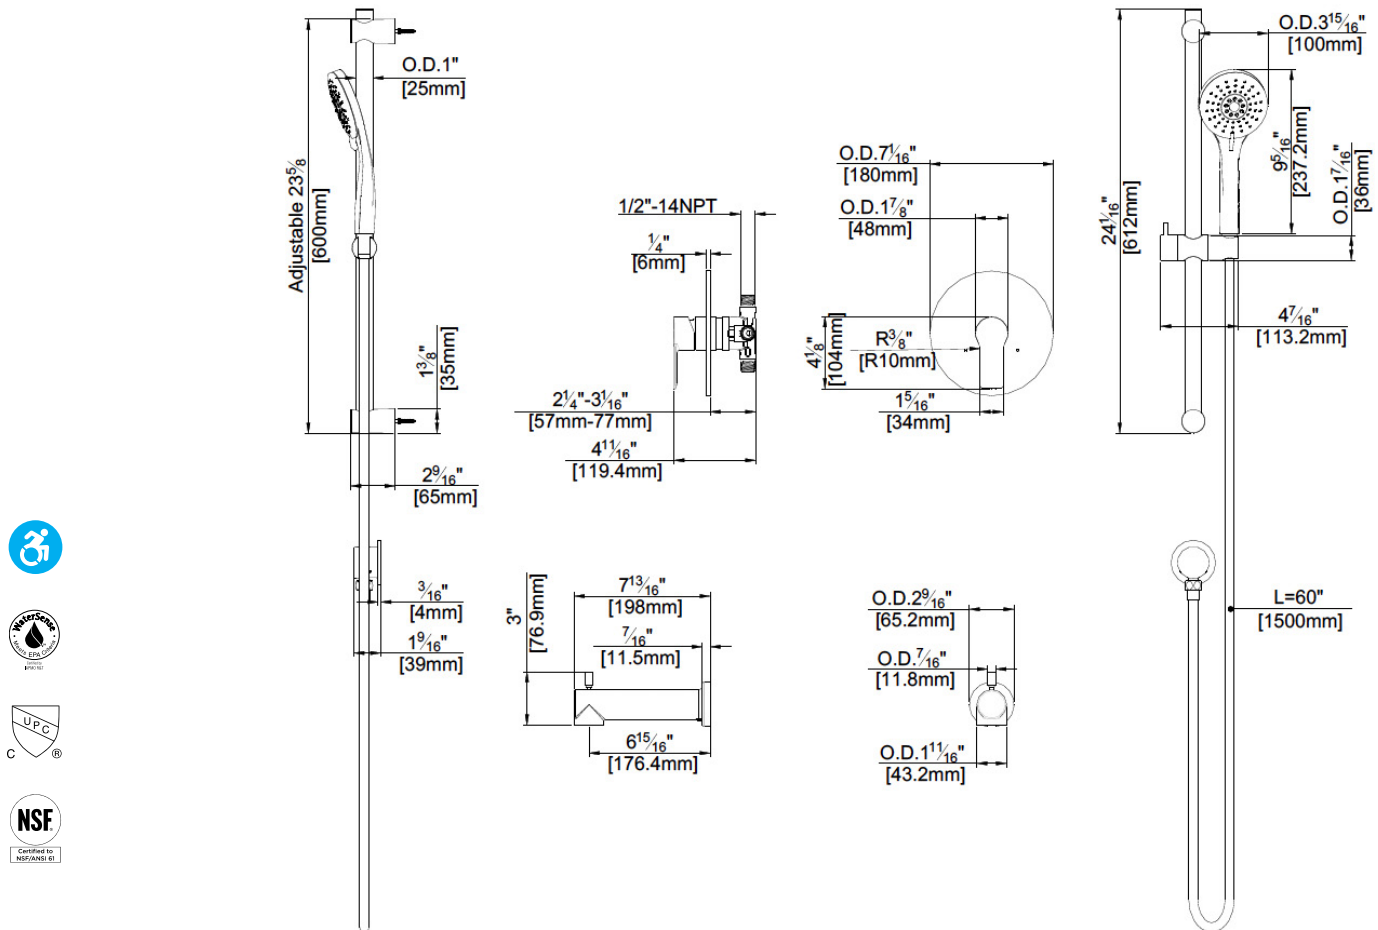

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

EPA Watersense Listed

ADA Compliant

Flow Rate:

Hand Shower 1.8 gpm @ 60 psig

Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F191239T-15**