fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 2-way, two handle diverting
- → Maximum temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:

F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP801013	Diverter Sleeve
FP605652	Diverter Handle
FP6001142-2PB	Round Cover Plate
FP605652	Diverter Handle
FP6006008	16" Shower Arm
FP6002150	8" Round Rain Showerhead
FP40120	3-Function Hand Shower*
FA802	Slide Bar with Integral Outlet
FP6001006	60" Shower Hose*

**sharing available where allowed by code

Kit with Alternate ADA Diverter Handle: **F192025T-AR**





Yaletown 4" Showerhead & Hand Shower on Slide Bar Trim Kit

F192025T-ABS



Features:







Bubble Level



Speed Connect

Matte Black: FP6001007MB Hose, FP40130MB 3-Function Hand Shower

Polished Chrome (CP), Brushed Nickel (BN) and * Matte Black (MB)

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com


Toll free: 1 800 460 7019



fluid

Technical Drawing

F192025T

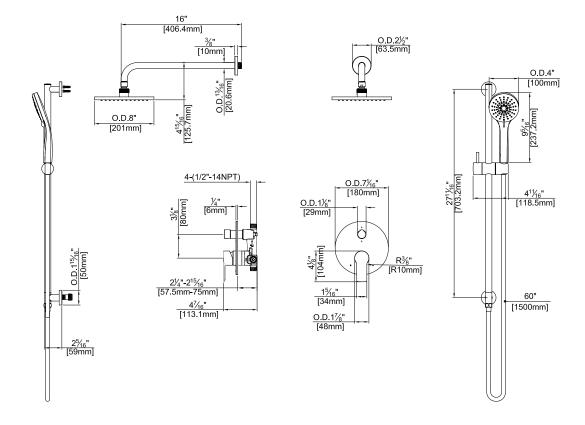

Codes and Standards:

ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, EPA Watersense Listed (excluding MB Version), ADA Compliant

Warranty:

NSF.

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:

F192025T-AR

Kit with square style cover plate & diverter handle: **F192025T-S**

Flow Rate:

Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F192025T-15**

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

Toll free: 1 800 460 7019

